


02FV001

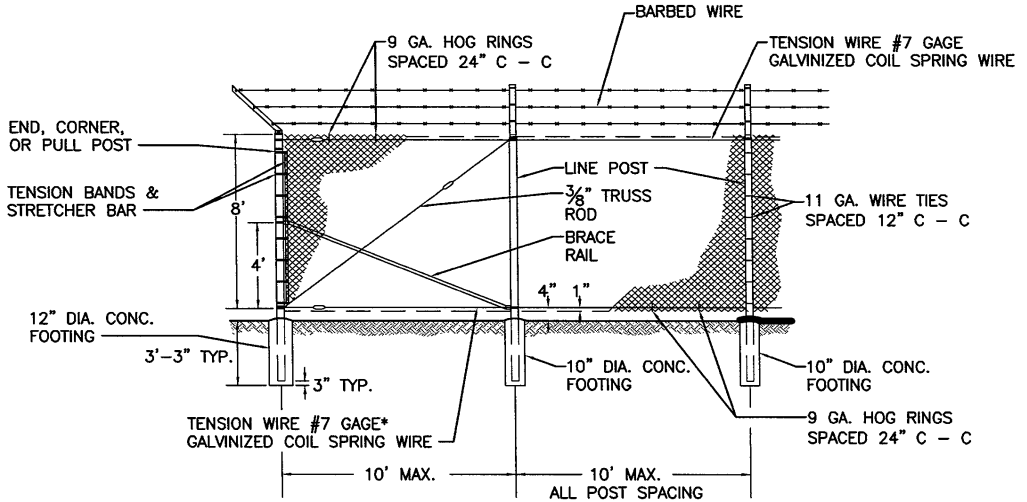

* TENSION BANDS SHALL BE SPACED 12" C-C.
 - TIGHTENING DEVICE

COMPONENT	END, CORNER, & PULL POST		LINE POST			TOP & BRACE RAIL	
	ROUND PIPE NOMINAL	ROLL FORMED STEEL	ROUND PIPE NOMINAL	"C" SECTION	H-BEAM STEEL	ROUND PIPE NOMINAL	ROLL FORMED STEEL
SIZE	3.00" O.D.	3.5" X 3.5"	2.5" O.D.	1.875" X 1.625"	2.25" X 1.70"	1.625" O.D.	1.625" X 1.25"
WEIGHT (LB/FT)	5.79 OR 4.64	5.14	3.65 OR 3.12	2.34	3.43	2.27 OR 1.84	1.35

NOTES: SPECIFIC DETAILS OF MANUFACTURE OF COMPONENT PARTS OF THE COMPLETE FENCE CONSTRUCTION SHALL BE SUBJECT TO THE APPROVAL OF THE ENGINEER. COMMERCIALY AVAILABLE ITEMS PRODUCED SPECIFICALLY FOR THE USE INTENDED SHALL BE USED WHEREVER POSSIBLE IN THE CONSTRUCTION OF THE FENCE.

CHAIN LINK FENCE SHALL BE 2" MESH NO. 9 GAGE GALVANIZED WIRE SECURELY FASTENED TO TENSION WIRE, LINE POST, RAILS, BRACES AND STRETCHER BARS SPACED AS SHOWN ABOVE.

FENCE MAY BE CONSTRUCTED WITH EITHER ROUND PIPE, "C" SECTION, "H" BEAM, OR ROLL FORMED STEEL COMPONENTS AS SHOWN IN THE TABLE ABOVE. LINE POSTS MAY BE ROUND PIPE, "C" SECTION, OR "H" BEAM. THE CORNER POSTS AND RAILS SHALL BE EITHER ROUND PIPE OR ROLL FORMED STEEL. THE TYPE OF COMPONENTS USED SHALL HAVE PRIOR APPROVAL BY THE ENGINEER BEFORE CONSTRUCTION.

ALL POSTS SHALL HAVE A MEANS TO SECURELY HOLD THE TOP TENSION WIRE IN POSITION AND ALLOW FOR THE REMOVAL AND REPLACEMENT OF A POST WITHOUT DAMAGING THE TOP TENSION WIRE.