


F:\21186-00\Design_Phase\ACAD\ADDENDUM\adder-magneticSwitches.dwg, 9/10/2010 12:13 PM

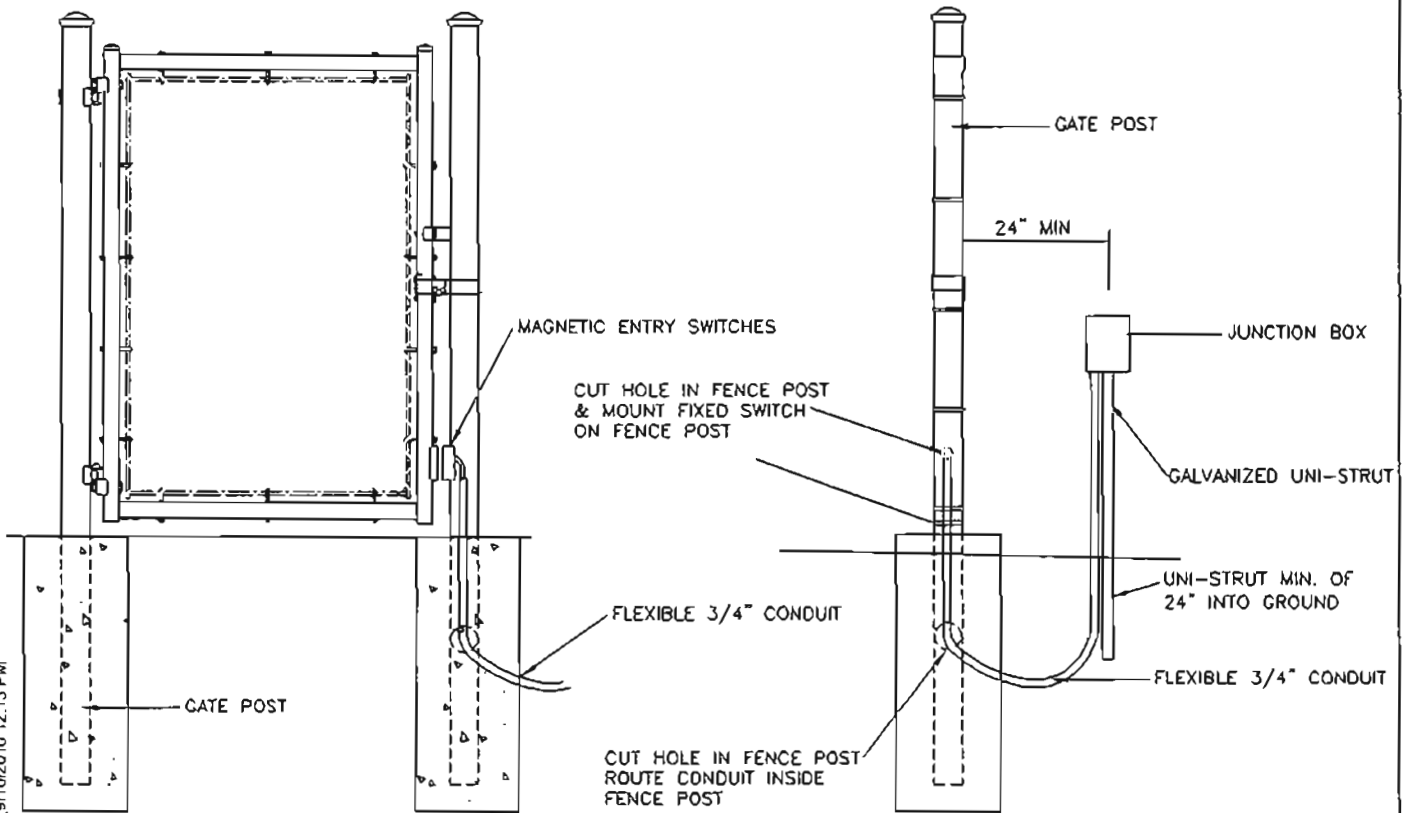

2
 13


MAGNETIC SWITCH INSTALLATION DETAIL
 SCALE: NONE

BANNER
 Engineering, Architecture, Surveying
 Banner Associates, Inc.
 730 South St., Ste 201 | Rapid City, SD 57701
 Tel/Fax: 605.343.0700
 www.bannerassociates.com


PROJECT TITLE
**NORTHRIDGE
 WATER STORAGE
 RESERVOIR**
 PROJECT LOCATION
 RAPID CITY
 SOUTH DAKOTA

SUPPLEMENTAL INSTRUCTIONS NO
ADDENDUM NO. 1
 SHEET TITLE
**MAGNETIC SWITCH
 INSTALLATION
 DETAIL**


DRAWN BY: CWC
 DESIGNED BY: CEB
 CHECKED BY: CEB
 JCB NO: 21186.00.01
 DATE: SEPT 10, 2010
 SCALE REDUCTION BAR
 FIGURE NO.:
EXHIBIT 7

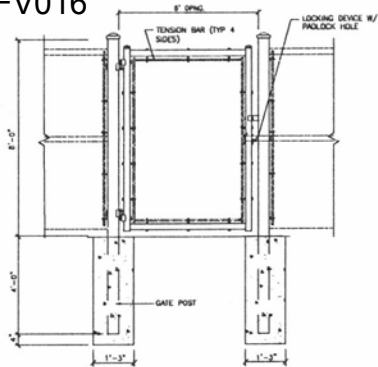


1 WALK THROUGH SWING GATE
SCALE: NONE

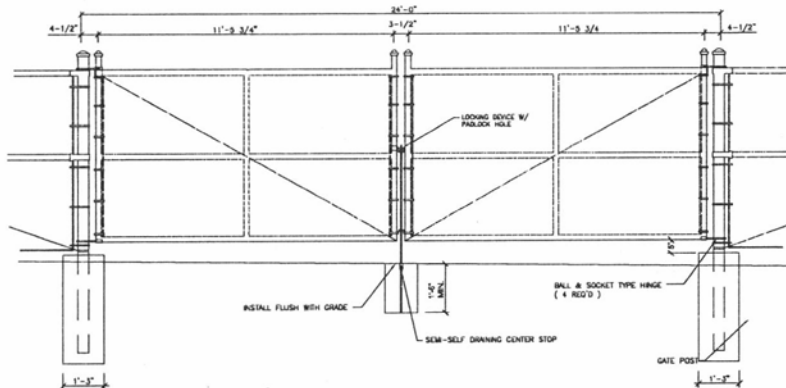


2 CHAIN LINK FENCING - DOUBLE SWING GATE
SCALE: NONE

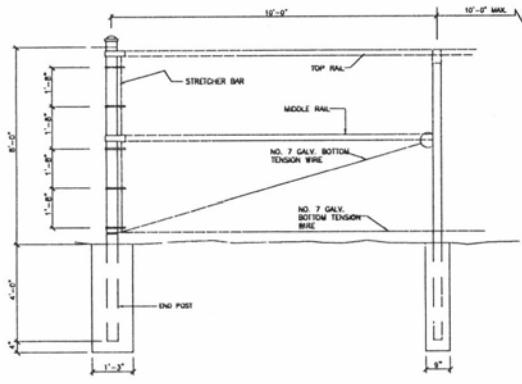

END PANEL




LINE POST

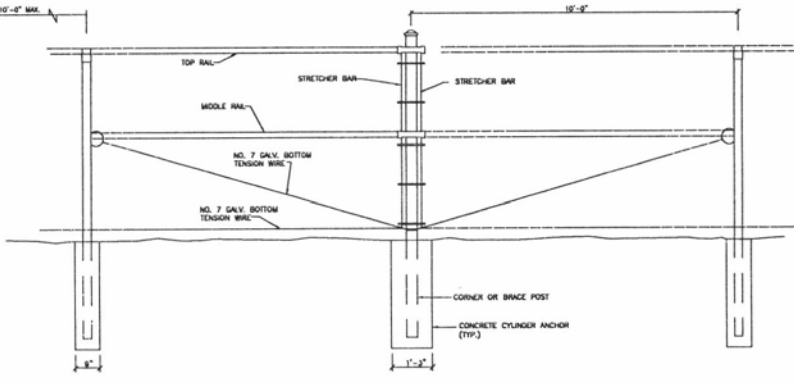


CORNER OR BRACE PANEL

3 CHAIN LINK FENCING - DETAILS
SCALE: NONE

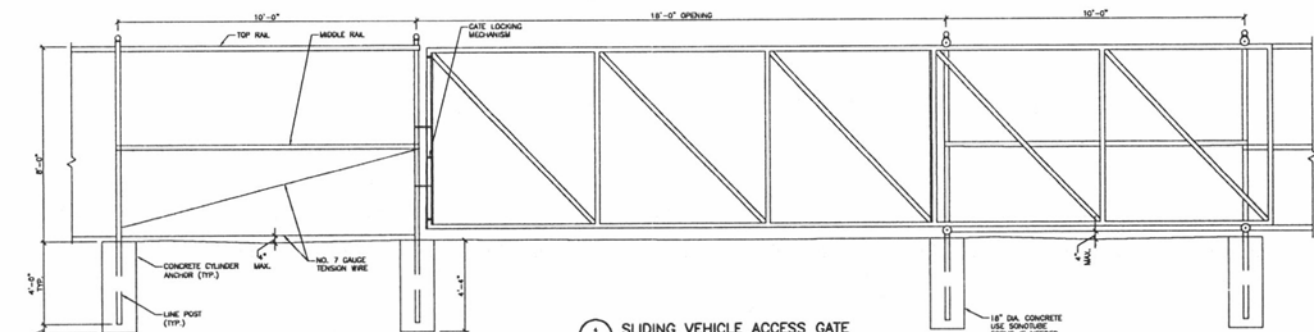

4 SLIDING VEHICLE ACCESS GATE
SCALE: NONE

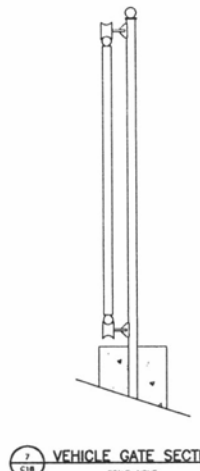


7 VEHICLE GATE SECTION
SCALE: NONE

FENCING GENERAL CONSTRUCTION NOTES:

- FURNISH AND INSTALL 80D 1/2 OF 8' COLORED CHAIN LINK FENCE AND ALL APPURTENANCES PER SECTION 03301 IN THE PROJECT SPECIFICATIONS.
- PROVIDE CONCRETE FOOTING FOR FENCE POST AT DISTANCES INDICATED ON THE PLAN SHEETS AND ACCORDING TO SECTION 03300 IN THE PROJECT SPECIFICATIONS.
- PROVIDE ALL FENCE COMPONENTS INCLUDING BUT NOT LIMITED TO FENCE FABRIC, FINISHING, WIRE, FITTINGS AND FASTENERS WITH A FUSED AND ADHERED PVC COATED FINISH. COATING SHALL CONFORM TO ASTM F844, CLASS 2B AND COLOR SHALL BE BROWN AS DEFINED IN ASTM F934.
- GENERAL CONTRACTOR SHALL PERFORM MARKING TO SITE TO ELIMINATE ANY GAPS BETWEEN THE FENCE FABRIC AND LOWER TENSION WIRE AND THE GROUND. THE FENCE FABRIC AND LOWER TENSION WIRE SHALL BE NO MORE THAN 4-INCHES ABOVE THE FINISHED GRADE AT ANY POINT ALONG THE FENCE WITH THE PRESCRIBED HEIGHT TO BE APPROXIMATELY 2-INCHES.
- FURNISH AND INSTALL GATE AND MOTORIZED GATE OPERATOR AND ALL NECESSARY APPURTENANCES PER SECTION 03081 IN THE SPECIFICATIONS. REMOTE KEYPADS SHALL BE LOCATED SEPARATELY AS SHOWN AT LOCATIONS INDICATED ON THIS SHEET. FINAL LOCATION OF KEYPADS SHALL BE DETERMINED BY OWNER, COORDINATE ELECTRICAL REQUIREMENTS OF KEYPADS AND OPERATOR WITH ELECTRICAL SUBCONTRACTOR.
- COORDINATE WITH ELECTRICAL SUB-CONTRACTOR AND INSTRUMENTATION AND CONTROLS SUPPLIER TO COORDINATE LOCATION OF MAGNETIC LIMIT SWITCHES THAT WILL BE WIRDED BACK TO THE CONTROLS SYSTEM.
- CONTRACTOR SHALL REPAIR/RELOCATE ANY DAMAGED/WELDED/CUT FENCE WITH A FUSED AND ADHERED PVC COATED FINISH IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS.

NOTE:
WARNING SIGN SIZE (20"x12" MIN.)
NEXT SIZE 2' SIGN HEIGHT
WARNING SIGN SHALL BE PLACED ON SLIDING GATE
AND ON WEST (LEFT) SOUTH SIDES OF FENCE.
(TOTAL OF 4 SIGNS)

5 WARNING SIGN
SCALE: NONE



6 ROLLER ASSEMBLY
SCALE: NONE



BANNER
Engineering, Architecture & Surveying
730 South St., Ste. 201, Boulder, CO, 80501
Tel: 303.440.1000
www.bannerprofessionals.com



HALF-SIZE
Designed By: [Signature]
Checked By: [Signature]
K.A.W.
Design Date: AUG. 2010
Print Date: AUG. 2010
Internal Job No.: 21188-00.01
Reviewed By: [Signature]
D. SCOTTE
Survey Date: JUNE 2010

NORTHRIDGE
WATER STORAGE RESERVOIR

CHAIN LINK
FENCING
DETAILS