

PANELS SHOWN MAY OR MAY NOT REPRESENT THE SPECIFIC PROFILE, ASK A SALESPERSON OR VISIT OUR WEBSITE FOR COMPLETE DETAILS.



**CUSTOMER SERVICE PROMISE:**

UNEQUALED TURNAROUND TIME • INFORMATIVE/HIGHLY SKILLED STAFF  
UNPARALLELED CUSTOMER SERVICE

**MISSION STATEMENT:**

INSPIRE THE FREEDOM TO CREATE



[WWW.BRIDGERSTEEL.COM](http://WWW.BRIDGERSTEEL.COM) • TOLL FREE: 877.STEELMT

7570 ENTRYWAY DRIVE BILLINGS, MT 59101  
11335 QUAIL RD. BLACK HAWK RAPID CITY, SD 57713




4120 DOUBLE EAGLE RD. E. HELENA, MT 59635  
6797 WILDCAT RD. EVANSVILLE CASPER, WY 82636

1558 AMSTERDAM RD. BELGRADE, MT 59714



## SL PANEL (NAIL STRIP)

AN ARCHITECTURALLY APPEALING CONCEALED FASTENER PANEL WITH A BUILT-IN NAIL FLANGE FOR EASE OF INSTALLATION

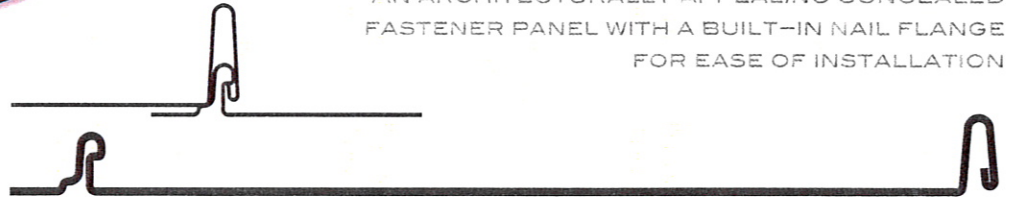

SL PANEL PROVIDES FOR QUICK AND EASY INSTALLATION - NO CLIPS REQUIRED.

(AVAILABLE WITH 1" AND 1 1/2" RIB HEIGHTS)

COMMON WIDTHS FOR PANELS WITH 1" HIGH RIB:

- 12" WIDE X 1" HIGH
- 16" WIDE X 1" HIGH

COMMON WIDTHS FOR PANELS WITH 1 1/2" HIGH RIB:

- 11" WIDE X 1 1/2" HIGH
- 15" WIDE X 1 1/2" HIGH

PANELS CAN BE PRODUCED FLAT OR WITH STRIATIONS. BRIDGER STEEL RECOMMENDS STRIATIONS TO MINIMIZE OIL CANNING. BACKER ROD MAY BE APPLIED UNDER FLAT PANEL APPLICATION TO HELP MINIMIZE OIL CANNING (OIL CANNING IS NOT A CAUSE FOR REJECTION).

SAVE MONEY WITH BRIDGER STEEL'S 26 GAUGE STANDARD COLORS WITH LIFETIME FILM INTEGRITY AND 40 YEAR CHALK AND FADE WARRANTY. COATED WITH THE HIGHEST QUALITY AND MOST ADVANCED CERAMIC IMPREGNATED SILICON MODIFIED POLYESTER (CSMP) PAINT SYSTEM AVAILABLE.

MANY CUSTOM COLORS AND KYNAR PAINT SYSTEMS AVAILABLE IN 26, 24 AND 22 GAUGE. PLEASE REFER TO COLOR CHART OR VISIT BRIDGERSTEEL.COM FOR MORE INFORMATION.

BRIDGER STEEL SPECIALIZES IN ARCHITECTURALLY APPEALING, UNIQUE PROFILES IN VARIOUS TYPES OF METALS INCLUDING, BUT NOT LIMITED TO, OUR RUSTIC MATERIALS TRUETEN® (1008), GALVANIZED, GALVALUME®, BONDERIZED, COPPER, REZIBOND®, RHEINZINK® AND OTHER CUSTOM METALS. CUSTOM TRIM AND ACCESSORIES AVAILABLE FOR ALL PROFILES. LOCAL AND NATIONWIDE DELIVERY AVAILABLE ON BRIDGER STEEL TRUCKS.

• \*CUSTOM WIDTHS AVAILABLE BETWEEN 9" AND 20" (EXCLUSIVE TO BRIDGER STEEL)

• BRIDGER STEEL RECOMMENDS INSTALLING THIS PANEL OVER A SOLID SUBSTRATE

• RECOMMENDED MINIMUM ROOF PITCH FOR PANELS WITH 1" & 1 1/2" RIB HEIGHT: 3:12

• WIND RATED AT 140 MILES PER HOUR

• PANELS CAN BE MANUFACTURED AT JOB SITE TO GREATLY REDUCE THE RISK OF DAMAGE DURING TRANSPORTATION

• PROTECTIVE FILM CAN BE APPLIED TO PANELS FOR ADDED PROTECTION AT CUSTOMER'S REQUEST OR AT BRIDGER STEEL'S RECOMMENDATION

• DUE TO EXPANSION AND CONTRACTION OF MATERIAL, 3' TO 30' PANEL LENGTHS ARE RECOMMENDED FOR THE NAIL STRIP PROFILE  
BRIDGER STEEL RECOMMENDS A FLOATING CLIP SYSTEM FOR ALL PANELS EXCEEDING 30' (SEE SALES REP FOR DETAILS)