


04SR003

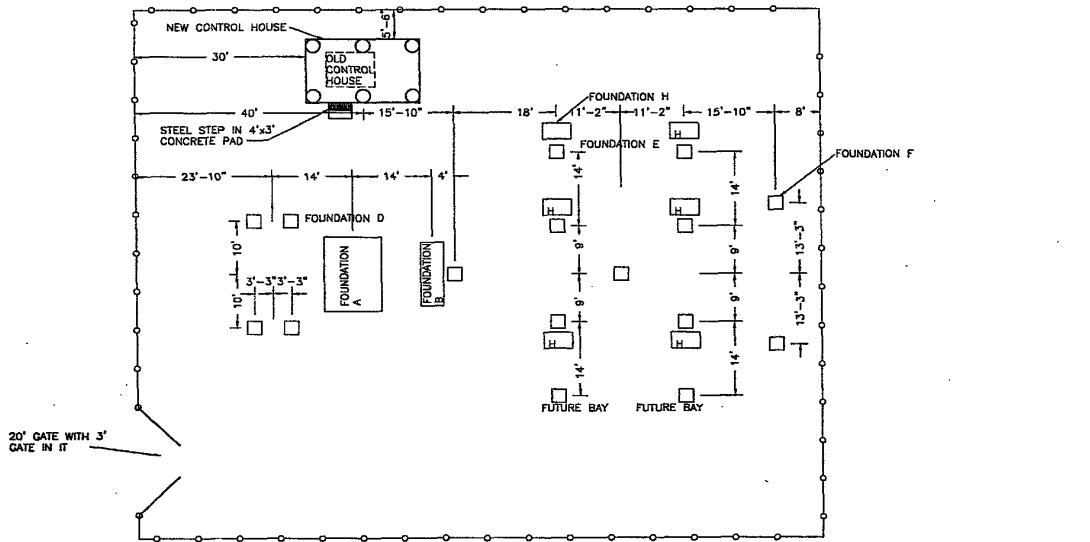

NOTES

1. GREASE AND ADJUST SWITCHES
2. REMOVE PRIVACY SLATS FROM FENCE
3. INSTALL NEW SLATS
4. INSTALL RIGID CONDUIT ABOVE GROUND AT ALL RECLOSERS

LEGEND

- SUBSTATION FENCE
- NEW CONSTRUCTION