05SV013

GRADING NOTES:

1. CONTOUR INTERVAL INTERVAL IS 2 FEET.
2. CONTOURS SHOWN ARE FINISHED GRADE. CONTRACTOR IS RESPONSIBLE FOR DETERMINING SUBGRADE ELEVATIONS.
3. SPOT ELEVATIONS ARE AT TOP BACK OF CURB UNLESS OTHERWISE NOTED.
4. ALL DISTURBED AREAS NOT COVERED WITH BUILDING, CONCRETE, OR ASPHALT SHALL RECEIVE 3" OF TOPSOIL AND BE SEEDED.
5. BENCHMARK = CP 3 - SOUTHWEST PROPERTY CORNER OF LOT L ELEV = 3372.87
6. SILT FENCE AS SHOWN SHALL BE INSTALLED FOR CONSTRUCTION AND SHALL REMAIN IN PLACE UNTIL VEGETATION IS ESTABLISHED ON SITE. TOTAL LENGTH OF SILT FENCE = 354 LF

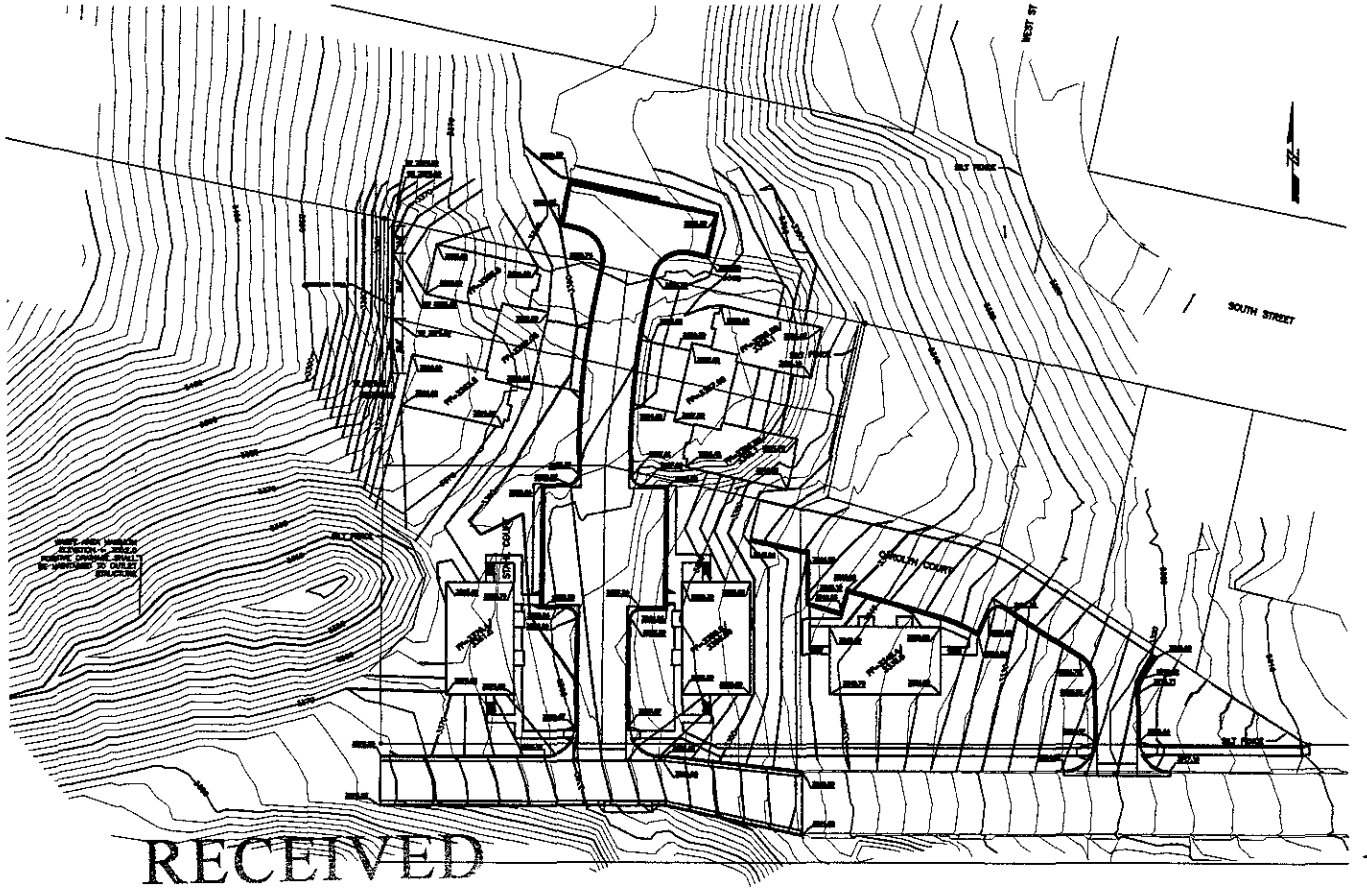

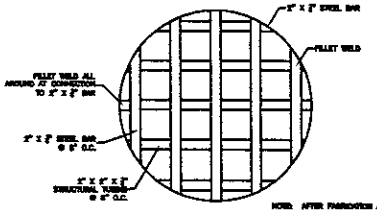

38 1/2" GRATE
N.T.S.

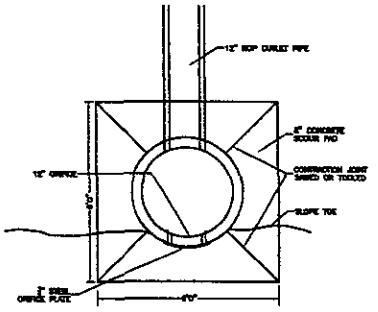

36" RCP RISER
TOP VIEW
N.T.S.



CAST IN PLACE CONCRETE SCOUR PAD
N.T.S.

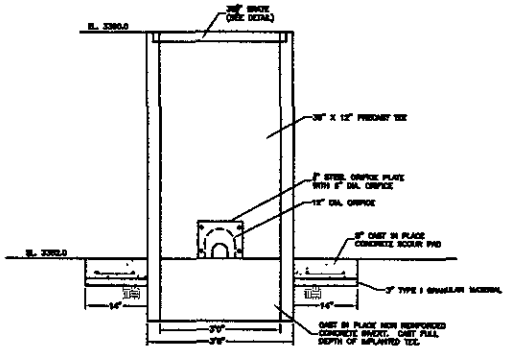

36" RCP RISER
FRONT VIEW
N.T.S.

RECEIVED
FEB - 9 2005
Rapid City Growth
Management Department

Ferber Engineering Company, Inc.

STAHL VICTORIAN ADDITION
GRADING PLAN
DETENTION CELL DETAILS

PROJECT NO. J01-102

SHEET NO. 3/4