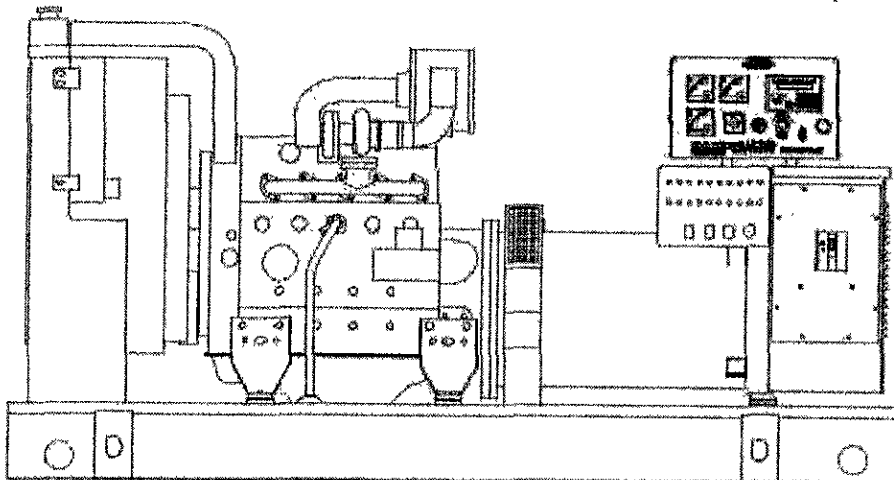


RECEIVED

JUL 01 2005

SD030Rapid City Growth
Management Department
Liquid Cooled Diesel Engine Generator SetsStandby Power Rating
30KW 60 HzPrime Power Rating
24KW 60 HzPower Matched
DEERE 2.4 DTA ENGINE
TurbochargedVERIZON WIRELESS

30 kW Diesel Models:

04810 120/240 1 phase Open Unit

04811 120/240 1 phase Level III Enclosure

04870 120/208 3 phase Open Unit

04871 120/208 3 phase Level II Enclosed

FEATURES

- **INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable GSA, NEMA, EGSA, and other standards, allows you to choose GENERAC POWER SYSTEMS with the confidence that these systems will provide superior performance.
- **TEST CRITERIA:**

 - ✓ PROTOTYPE TESTED
 - ✓ SYSTEM TORSIONAL TESTED
 - ✓ ELECTRO-MAGNETIC INTERFERENCE
 - ✓ NEMA MG1-22 EVALUATION
 - ✓ MOTOR STARTING ABILITY
 - ✓ SHORT CIRCUIT TESTING
 - ✓ UL 2200
- **SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Generac models. It provides optimized
- FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- **SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own an GENERAC POWER SYSTEM.
- **ECONOMICAL DIESEL POWER.** Low cost operation due to modern diesel engine technology. Better fuel utilization plus lower cost per gallon provide real savings.
- **LONGER ENGINE LIFE.** Generac heavy-duty diesels provide long and reliable operating life.
- **GENERAC TRANSFER SWITCHES, SWITCHGEAR AND ACCESSORIES.** Long life and reliability is synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the GENERAC product line includes its own transfer systems, accessories, switchgear and controls for total system compatibility.

GENERAC®

POWER SYSTEMS, INC.

APPLICATION & ENGINEERING DATA

JUL 01 2005

Rapid City Growth SD030

GENERATOR SPECIFICATIONS

TYPE	Four-pole, revolving field
ROTOR INSULATION	Class F
STATOR INSULATION	Class F
TOTAL HARMONIC DISTORTION	<5%
TELEPHONE INTERFERENCE FACTOR (TIF)	<50
ALTERNATOR	Self-ventilated and drip-proof
BEARINGS (PRE-LUBED & SEALED)	1
COUPLING	Direct, Flexible Disc
LOAD CAPACITY (STANDBY)	100%
LOAD CAPACITY (PRIME)	110%

NOTE: Emergency loading in compliance with NFPA 99, NFPA 110, paragraph 5-13.2.6. Generator rating and performance in accordance with ISO8528-5, BS5514, SAE J1349, ISO3046 and DIN6271 standards.

EXCITATION SYSTEM

- DIRECT
- DC excitation system ✓
 - Low-velocity brushes and slip rings ✓
- BRUSHLESS
- Magnetically coupled DC current ✓
 - Eight-pole exciter w/ battery-driven field boost ✓
 - Mounted outboard of main bearing ✓
- REGULATION
- Solid-state ✓
 - ±1% regulation ✓

GENERATOR FEATURES

- Four pole, revolving field generator, directly connected to the engine shaft through a heavy-duty, flexible disc for permanent alignment
- Generator meets the temperature rise standards for class "F" insulation as defined by NEMA MG1-32.6, while the insulation system meets the requirements for the higher class "H" rating
- All prototype models have passed a three-phase symmetrical short circuit test to assure system protection and reliability
- All prototype models are tested for motor starting ability by measuring the instantaneous voltage dip with a waveform data acquisition system
- All models utilize an advanced wire harness design for reliable interconnection within the circuitry.
- Magnetic circuit, including amortisseur windings, tooth and skewed stator design, provides a minimal level of waveform distortion and an electromagnetic interference level which meets accepted requirements for standard AM radio, TV, and marine radio telephone applications.
- Voltage waveform deviation, total harmonic content of the AC waveform, and TIF (Telephone Influence Factor) have been evaluated to acceptable standards in accordance with NEMA MG1-32.
- Alternator is self-ventilated and drip-proof constructed.
- Fully life-tested protective systems, including "field circuit and thermal overload protection" and optional main-line circuit breakers capable of handling full output capacity
- System Torsional acceptability confirmed during Prototype Testing.

ENGINE SPECIFICATIONS

MAKE	DEERE
MODEL	2.4DT
CYLINDERS	4 in-line
DISPLACEMENT	2.4 Liter (149 cu. in.)
BORE	86 mm (3.39 in.)
STROKE	105 mm (4.13 in.)
COMPRESSION RATIO	18:1
INTAKE AIR	Turbocharged
NUMBER OF MAIN BEARINGS	5
CONNECTING RODS	4-Drop forged steel
CYLINDER HEAD	Cast iron w/ overhead valve
PISTONS	4-Aluminum alloy
CRANKSHAFT	Forged Steel

VALVE TRAIN

LIFTER TYPE	Solid
INTAKE VALVE MATERIAL	High Temp
EXHAUST VALVE MATERIAL	High Temp

ENGINE GOVERNOR

<input type="checkbox"/> ELECTRONIC	Standard
FREQUENCY REGULATION, NO-LOAD TO FULL LOAD	0.5%
STEADY STATE REGULATION	±0.25%

LUBRICATION SYSTEM

TYPE OF OIL PUMP	Gear
OIL FILTER	Full flow, cartridge
CRANKCASE CAPACITY	7.5 qts

COOLING SYSTEM

TYPE OF SYSTEM	Pressurized, closed recovery
WATER PUMP	Pre-lubed, self-sealing
TYPE OF FAN	Pusher
NUMBER OF FAN BLADES	6
DIAMETER OF FAN	457.2 mm (18.0 in.)
COOLANT HEATER	120V, 1000 W

FUEL SYSTEM

FUEL	#2D Fuel (Min Cetane #40)
	(Fuel should conform to ASTM Spec.)
FUEL FILTER	10 Micron
FUEL INJECTION PUMP	Bosch (VE)
FUEL PUMP	Engine Driven Gear Type
INJECTORS	Pintel Type, 2100 PSI
ENGINE TYPE	Pre-combustion, swirl chamber
FUEL LINE (Supply)	6.35 mm (0.25 in.)
FUEL RETURN LINE	3.17 mm (0.125 in.)

ELECTRICAL SYSTEM

BATTERY CHARGE ALTERNATOR	42 Amps at 12 V
STARTER MOTOR	12 V 290A @ 0 °C
RECOMMENDED BATTERY	(1) - 12 V, 90 A.H., 27F
GROUND POLARITY	Negative

SD030

OPERATING DATA

	STANDBY SD030		PRIME SD030	
GENERATOR OUTPUT VOLTAGE/KW-60Hz 120/240V, 1-phase, 1.0 pf 120/208V, 3-phase, 0.8 pf	NOTE: Consult your Generator dealer for additional voltages.		Rated AMP 25 104 25 87	
MOTOR STARTING KVA Maximum at 95% instantaneous voltage dp with optional alternator, 60 Hz	120/208/240V 60		120/208/240V 60	
FUEL Fuel consumption—60 Hz: Load gal./hr. Fuel pump lift	100% 2.5 9.5	80% 2.1 7.9	100% 2.1 7.9	80% 1.8 6.8
COOLING Coolant capacity System - lit. (US gal.) Engine - lit. (US gal.) Coolant flow/min 60 Hz - lit. (US gal.) Heat rejection to coolant 60 Hz full load BTU/hr. Inlet air to radiator 60 Hz - m ³ /min. (cfm) Max. air temperature to radiator °C (°F) Max. ambient temperature °C (°F)	11.2 (9.0) 2.6 (0.7) 8.6 (2.3) 120,000 130 (4,600) 60 (140) 48.9 (120)		11.2 (9.0) 2.6 (0.7) 8.6 (2.3) 96,000 130 (4,600) 60 (140) 48.9 (120)	
COMBUSTION AIR REQUIREMENTS Flow at rated power 60 Hz - cfm	100		89	
EXHAUST Exhaust flow at rated output 60 Hz - m ³ /min. (cfm) Max. recommended back pressure "Hg Exhaust temperature 60 Hz (full load) °C (°F) Exhaust outlet size	6.9 (216) 1.5 549 (1100) 3" O.D.		7.2 (263) 1.5 510 (1010) 3" O.D.	
ENGINE Rated RPM 60 Hz HP at rated kW 60 Hz Piston speed 60 Hz - m/min. (ft./min.) BMEP 60 Hz - psi	1800 48 378 (1238) 144		1800 39 378 (1238) 116	
DERATION FACTORS Temperature 6% for every 10°C above - °C 2.27% for every 10°F above - °F Altitude 1.1% for every 100 m above - m 3.5% for every 1000 ft. above - ft.	25 77 1067 3500		25 77 1067 3500	

RECEIVED

JUL 01 2005

 Rapid City Growth
 Management Department

STANDARD ENGINE & SAFETY FEATURES

SD030

- High Coolant Temperature Automatic Shutdown
- Low Coolant Level Automatic Shutdown
- Low Oil Pressure Automatic Shutdown
- Overspeed Automatic Shutdown (Solid-state)
- Crank Limiter (Solid-state)
- Oil Drain Extension
- Radiator Drain Extension
- Factory-Installed Cool Flow Radiator
- Closed Coolant Recovery System
- UV/Ozone Resistant Hoses
- Rubber-Booted Engine Electrical Connections
- Secondary Fuel Filter
- Fuel Shutdown Solenoid
- Batteries 2 - 12 Volt 90 AH
- Stainless Steel Flexible Exhaust Connection
- Battery Charge Alternator
- Battery Cables
- Composite Battery Box
- Vibration Isolation of Unit to Mounting Base
- 24 Volt, Solenoid-Activated Starter Motor
- Air Cleaner
- Air Cleaner Service Indicator
- Fan Guard (CSA Compliant)
- CSA Guarding
- Critical Grade Muffler (Shipped Loose With Open Unit)
- High Temperature Exhaust Wrap
- Alternator Tropicalization
 - Resists Moisture, Fungus and Abrasives
 - In Addition to Standard Class H Epoxy Impregnation Coating
- Upsized Alternator For Increased Motor Starting
- Propylene Glycol 50/50 Mix Antifreeze
- Oil (19.0 Quarts)
- Coolant Expansion and Recovery Tank
- Extended Factory Test (2.5 Hr)
 - Stepped Loads
 - Frame Temperature Test
- Specification Sheet Does Not Reflect Any Varzon Wireless Corporate Authorized Variations
- "E" Control Console -- Digital/Analog Hybrid
 - Communication Software for Remote Access
 - Analog Reading AC Volts
 - Analog Reading AC Amps
 - Analog Frequency
 - Emergency Stop Button
- Audible Alarm
- 11 Gauge Control Panel Enclosure
- Programmable Engine Control (See Bulletin #0161310SBY For Details)
- 20 Light Annunciator Generator Alarms
- 8 Form-C Dry Contact Output Relays
- 120 Volt Coolant Heater 1800 Watt with 3 Wire Connection Cord
- Mainline Circuit Breaker
 - 200 Amp & 100 Amp -- 120/240 Single Phase
 - 200 Amp & 50 Amp -- 120/208 Three Phase
- Flexible Fuel Lines
- Fuel Pressure Loss Protection System
- UL2200 Listed
- Gasetank
 - 48 Hr. Runtime at 100% Load
 - Double Wall
 - 125% Engine Fluid Containment and Alarms of all Generator Liquids
 - Fuel Level Sender and Visible Level Gauge
 - Rupture Basin Alarm
 - Emergency Vents
 - Check Valve (inlet and return)
 - FM Fusible Link (185°F) Shutoff
 - UL 142 Listed
 - Washington State maximum of 11.4 gallons
 - Southern California limitation of 52 gallons
- Consult State and Local Codes for Specific Requirements in your area
- Five Year Extended Warranty
- Enclosure Options
 - Open Generator Set w/ Duct Adapter
 - Weather Protective Sound Attenuated Enclosure w/ Enclosed Critical Grade Muffler and Flex Exhaust
- 24V Dual-Rate 10 Amp Battery Charger With 120V 3 Wire Connection Cord



Distributed by:

RECEIVED

JUL 01 2005

Rapid City Growth
Management Department

Design and specifications subject to change without notice. Dimensions shown are approximate. Contact your Generac dealer for certified drawings. DO NOT USE THESE DIMENSIONS FOR INSTALLATION PURPOSES.

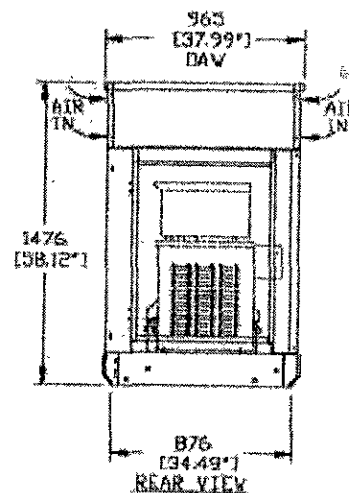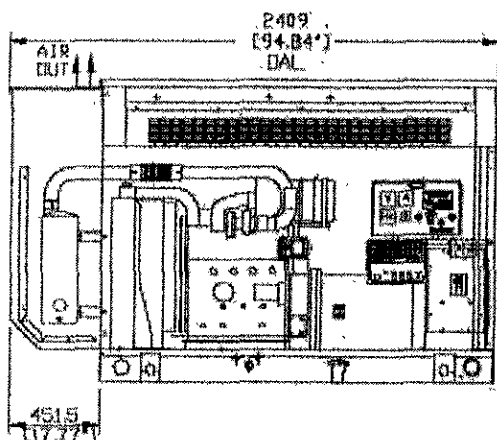

mm [in]

GENERAC POWER SYSTEMS, INC. • P.O. BOX 8 • WAUKESHA, WI 53187

262/544-4811 • FAX 262/544-4851

0F0835

Management Department
Rapid City Growth
EM
JUL 0 1 2005

NOTES

RECOMMENDED ELECTRICAL SUB-UPS (SEE TOP VIEW)	
DESCRIPTION	INSIDE BASE
AC LOAD LEAD CONDUIT (150A)	A
*20/240V AC FOR BATTERY CHARGER AND BLOCK HEATER	B
AC LOAD LEAD CONDUIT HOOD-UP	■





ENGINE SERVICE CONNECTIONS
FUEL INLET & RETURN = 1/4" NPT COUPLING
OIL & RADIATOR DRAINS = 1/2" NPT COUPLING
EXHAUST OUTLET = 2-1/2" O.D. EXHAUST ELBOW AS SHOWN ON OPEN SET
2-1/2" O.D. MUFFLER OUTLET WITH COMPARTMENT

NOTE
UNIT IS SHIPPED WITH FUEL SUPPLY AND RETURN LINES DISCONNECTED AND PLUGGED BETWEEN ENGINE AND FUEL TANK THIS HAS BEEN DONE TO FACILITATE PRESSURE TESTING OF THE TANK IN THE FIELD FOR INFORMATION REGARDING CONNECTING THE FUEL SUPPLY AND RETURN LINES PRIOR TO START UP, SEE THE FUEL TANK FIELD TESTING PROCEDURE SUPPLIED IN THE TANK LOOSE VENTS KIT WHICH IS SHIPPED WITH THIS GENERATOR

RECEIVED
OP 125A-3 PHASE AIR DUCT BREAKER

**DIMENSIONS ARE FOR BASE MOUNTING LOCATIONS

WEIGHT DATA
OPEN SET UNIT 607 kg [1336 lbs] (WET)
TANK 338 kg [745 lbs]
STEEL COMPARTMENT ESTIMATED 341 kg [752 lbs]

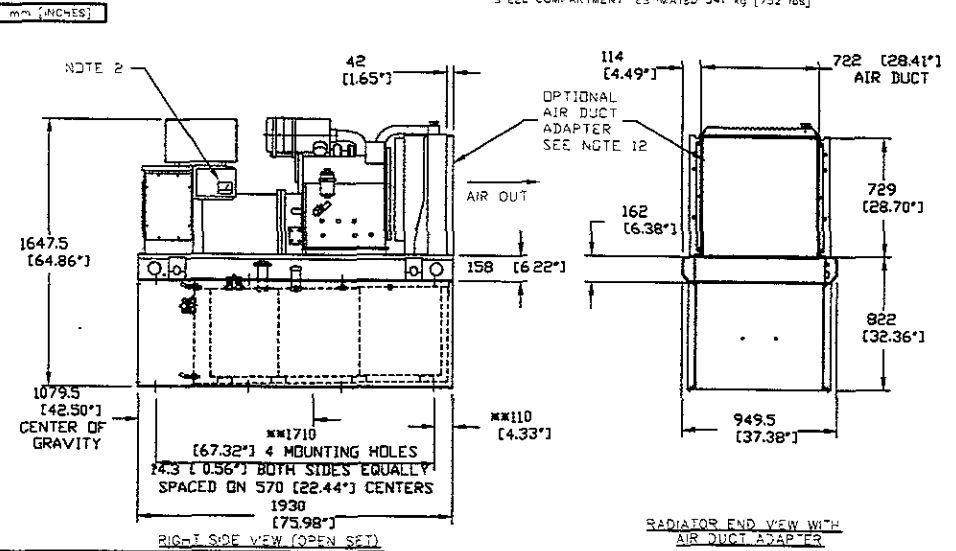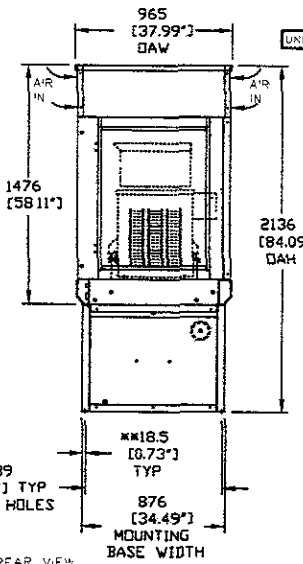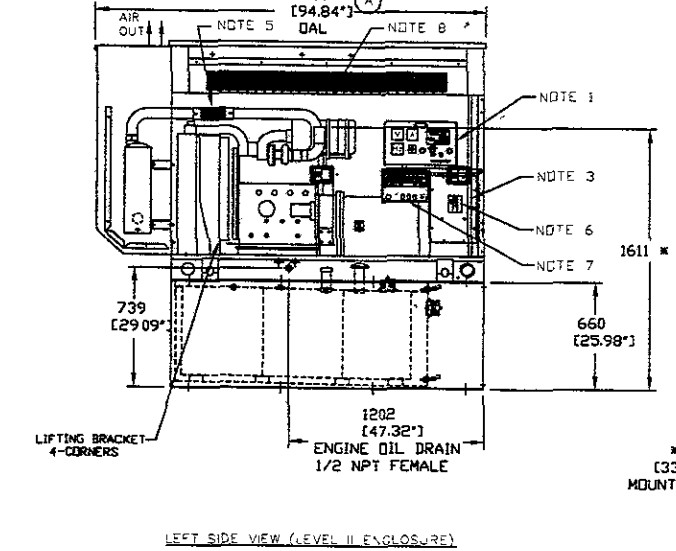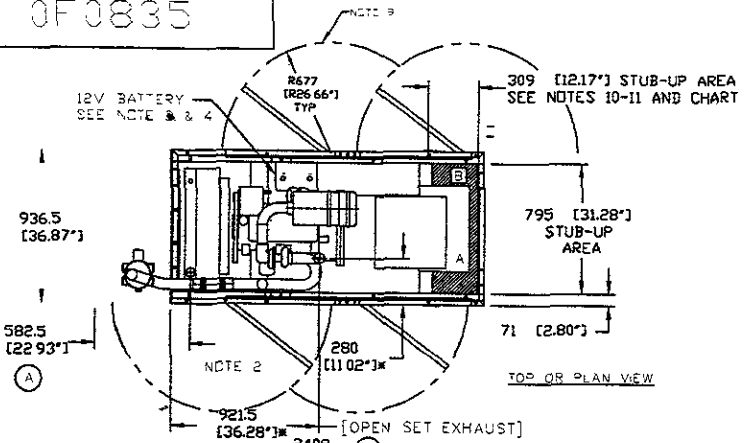

GENERAL POWER SYSTEMS OWNS THE COPYRIGHT OF THIS DWG WHICH IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SUPPLIED WITHOUT THE EXPRESS WRITTEN CONSENT OF GENERAC POWER SYSTEMS

EST WT
FINAL WT

DO NOT SCALE

ALL DIMENSIONS AND TOLERANCING PER ASME Y14.5M-1994

UNLESS OTHERWISE SPECIFIED

ALL XX DIM --- 0.4 MM
ALL XXX DIM --- 0.4 MM
ALL XXX DIM --- 0.5 MM
ALL ANGLES --- 90

DRAWING TITLE
INSTALL DWG, 30kW VERIZON DIESEL L2A ENCL

MATERIAL
N/A

DWN	RS	DATE	2/23/04	WFC	N/A	DATE	N/A
CHKD	ADS	DATE	3/2/04	APPD	BCB	DATE	3/2/04

RELEASED FOR PRODUCTION BY B BAIRD DATE 3/2/04

GENERAC POWER SYSTEMS
Waukesha
P.O. BOX 8
WAUKESHA, WI 53187

FILE NAME	0F0835-A.DWG	SIZE	B
SCALE	1 = 40	FIRST USE	VERIZON L2A
DWG NO	0F0835	REV	A

5/10/04	G-2964-A	ADDED OVERALL LENGTH DIM AND UPDATED OTHER MISCL NFO SEE LOG			
---------	----------	--	--	--	--