


Steel
Cabinet
to be
removed



NORTH WEST CORNER OF BUILDING EXTERIOR

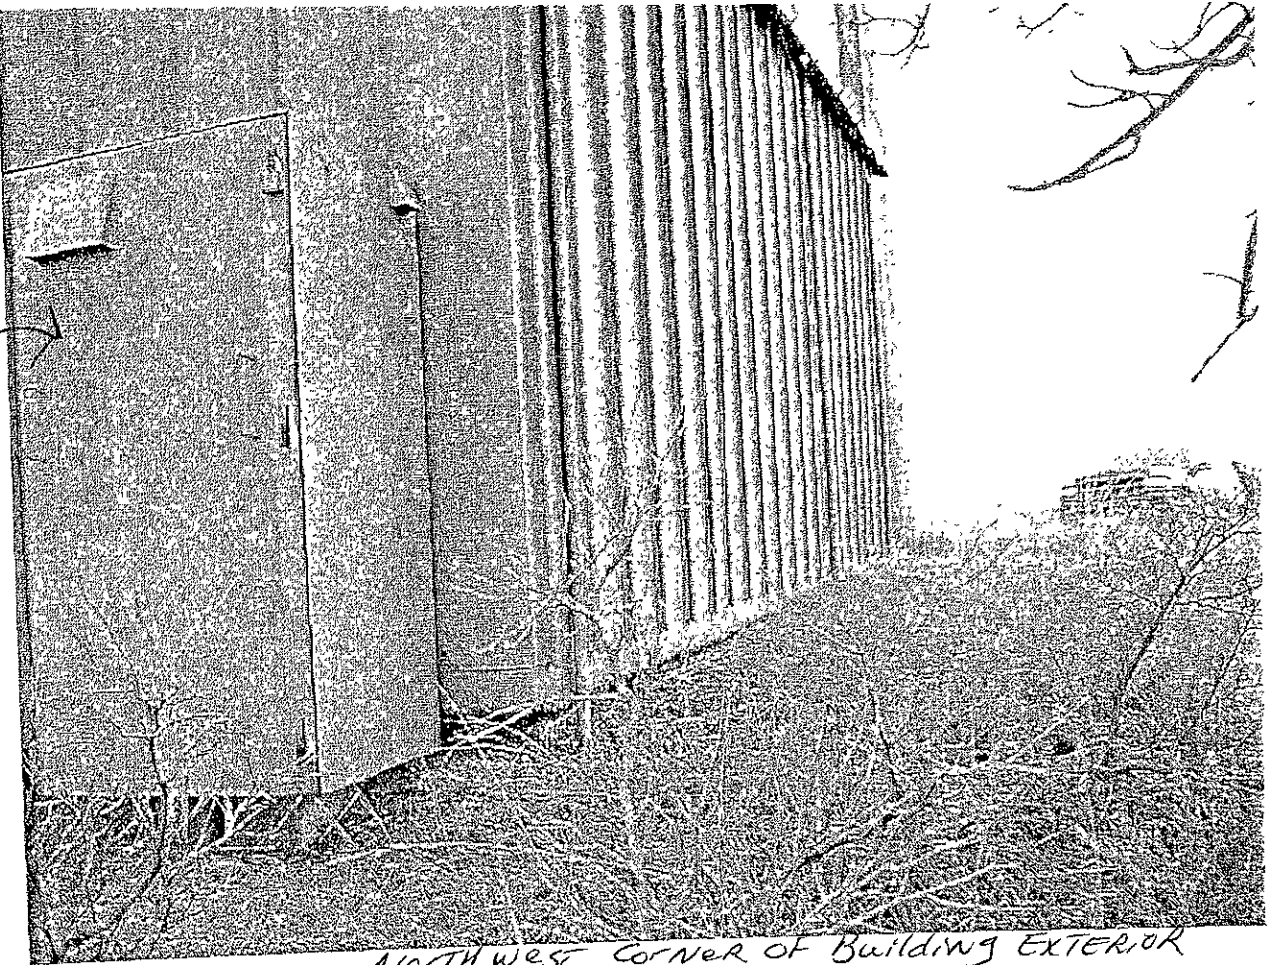

Close up of NORTH WEST CORNER of Slab
Proposed Mud-JACK SITE.


RECEIVED

OCT 11 2007

Rapid City Growth
Management Department


MINOR
DIRT
EXCAVATION
DRAIN TILE
OR SMALL
RETAINING WALL

18"

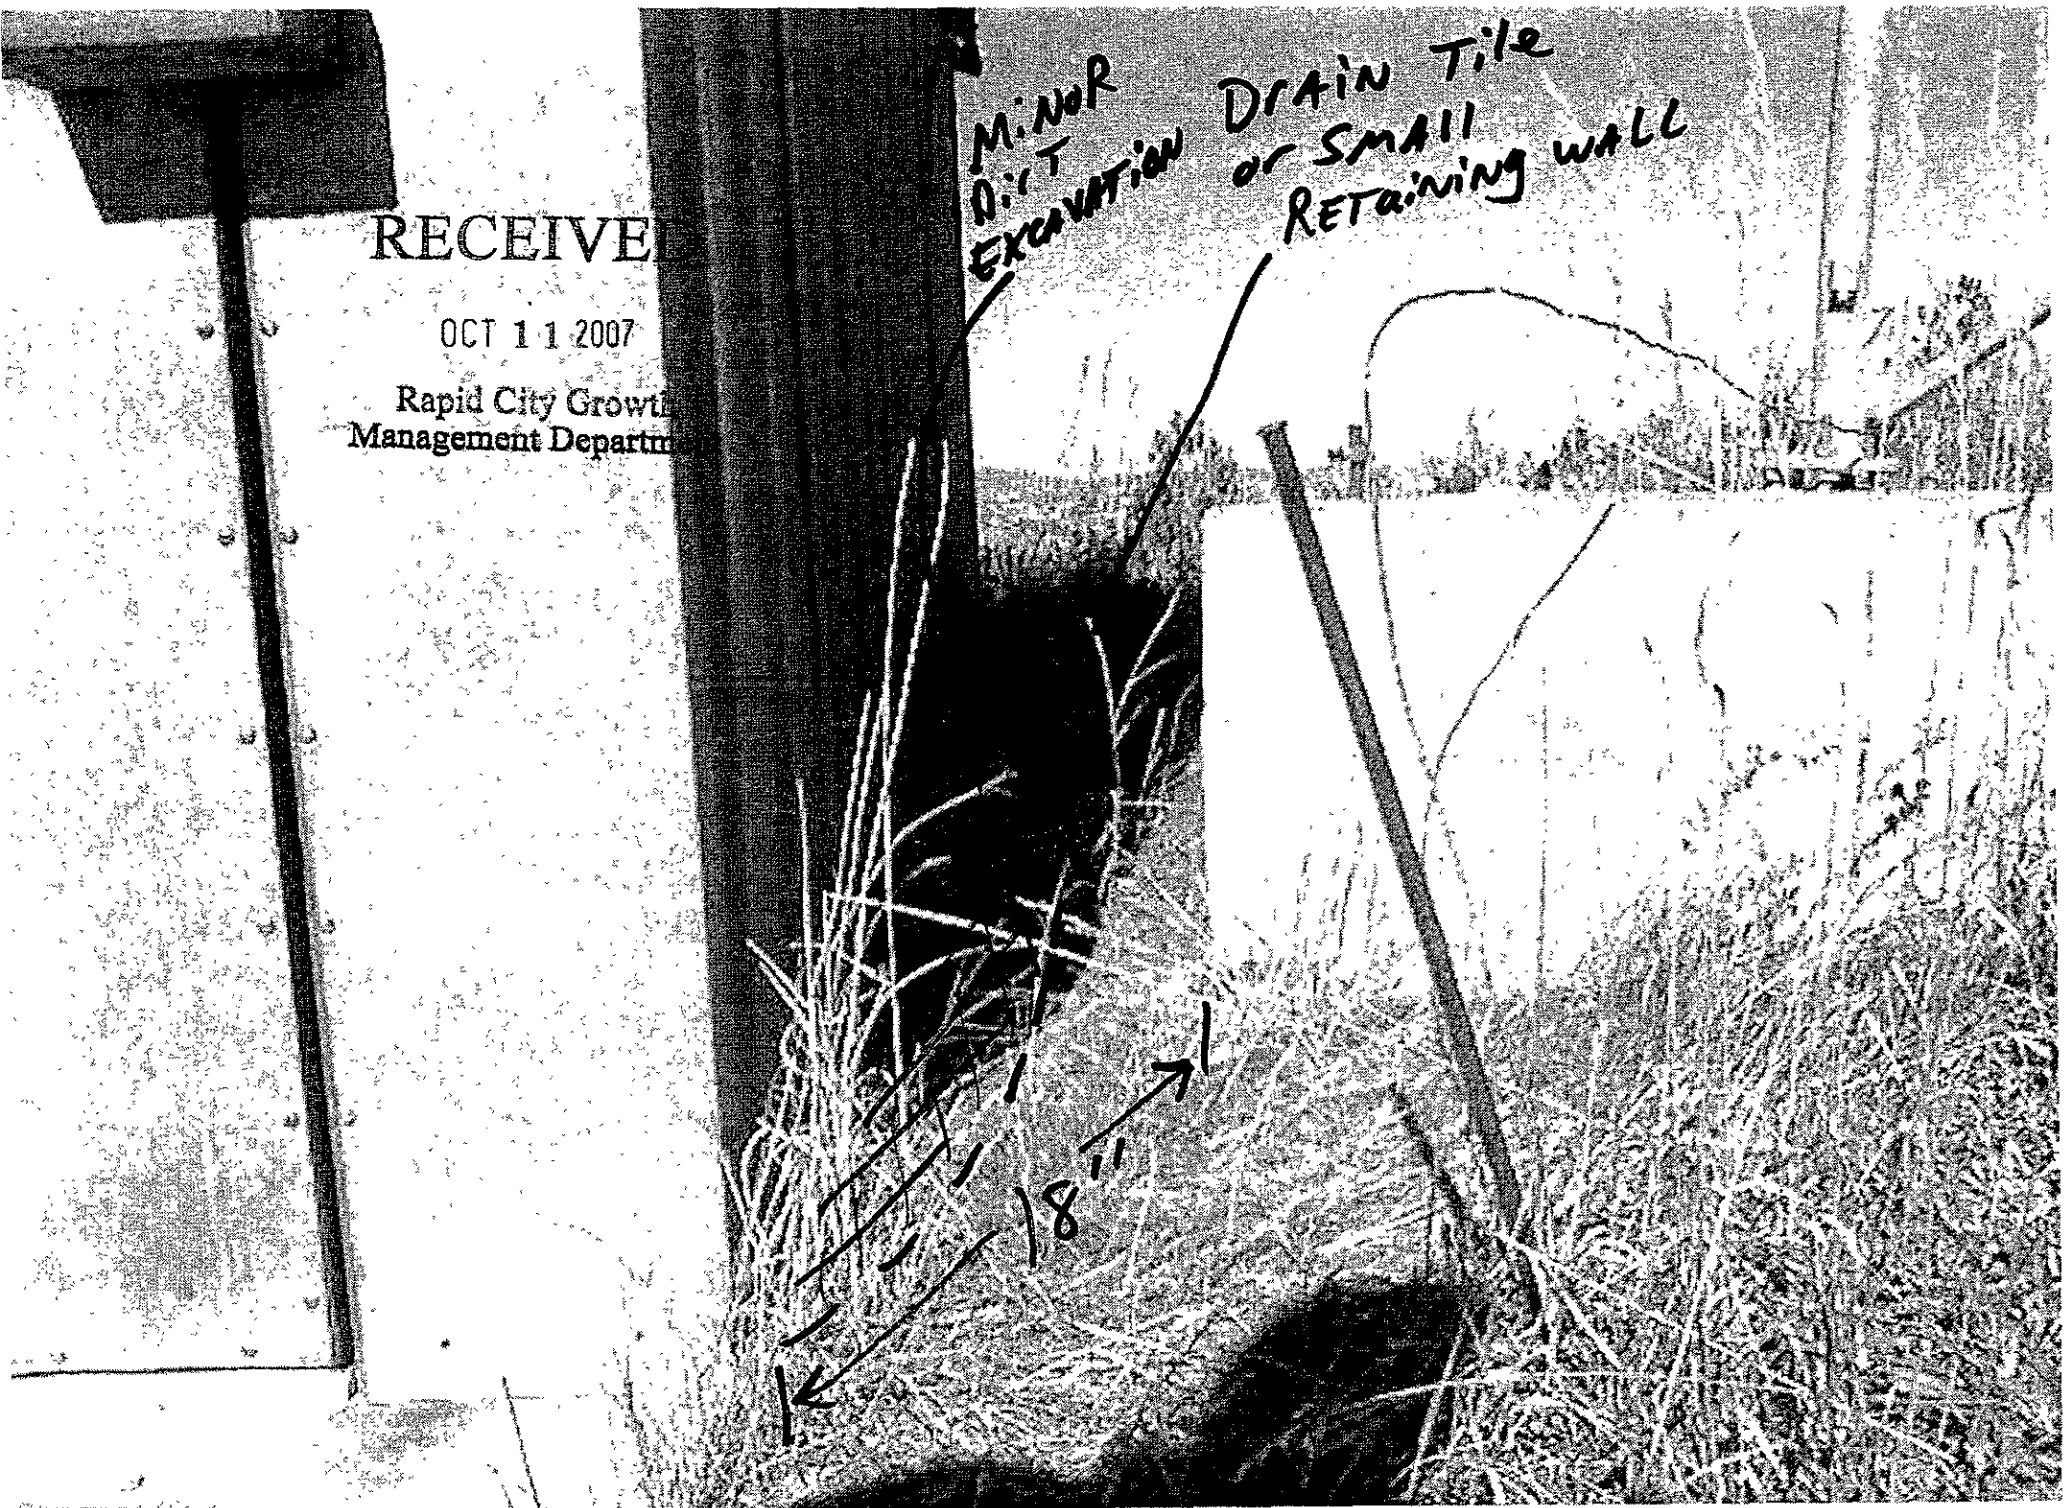




INTERIOR DAMAGE FROM WATER INTRUSION

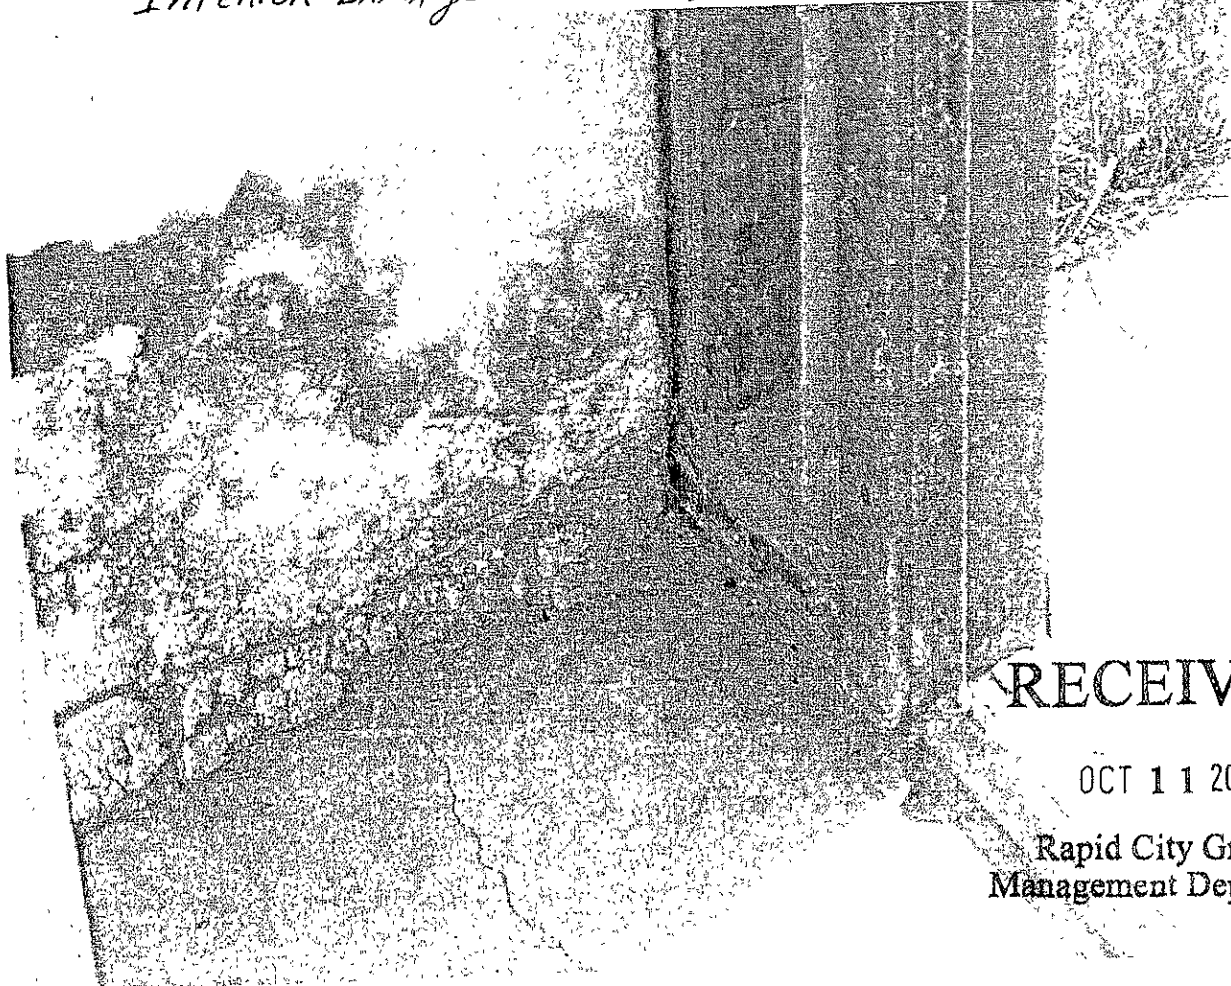

RECEIVED

OCT 11 2007

Rapid City Growth
Management Department

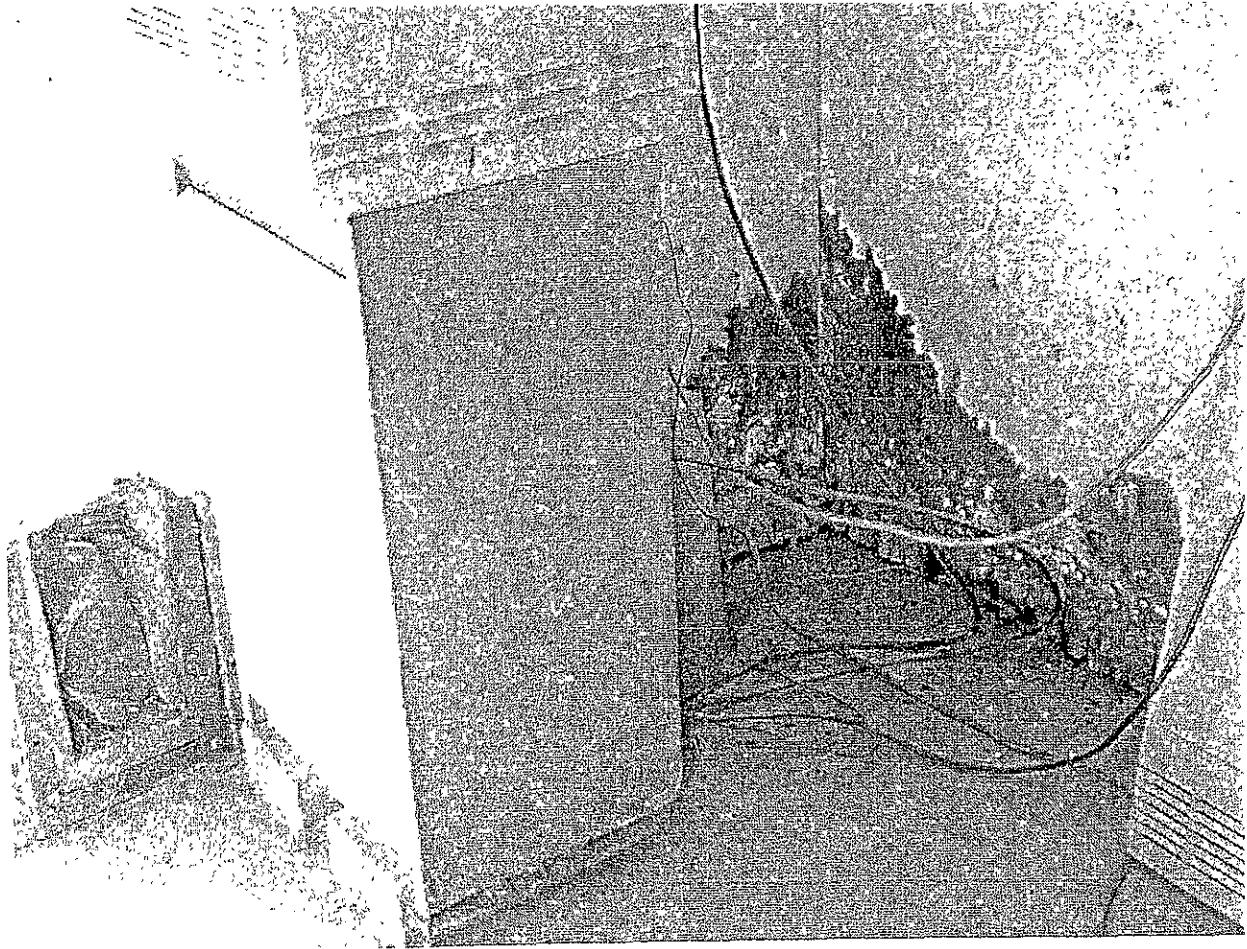


*INTERIOR Damage from
Water Intrusion*

RECEIVED

OCT 11 2007

Rapid City Growth
Management Department


MODEL IDENTIFICATION CODES

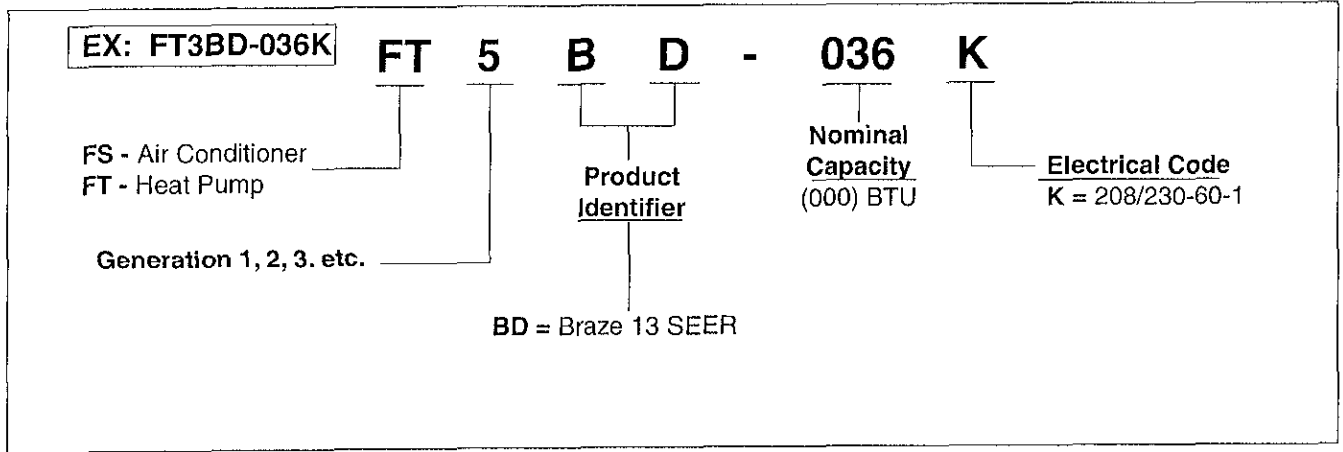

DIMENSIONS

HEAT PUMP OUTDOOR SECTION

FT5BD-	018K	024K	030K	036K	042K	048K	060K
H	29	29	41	45	41	45	45
W	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4
D	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4	31 1/4

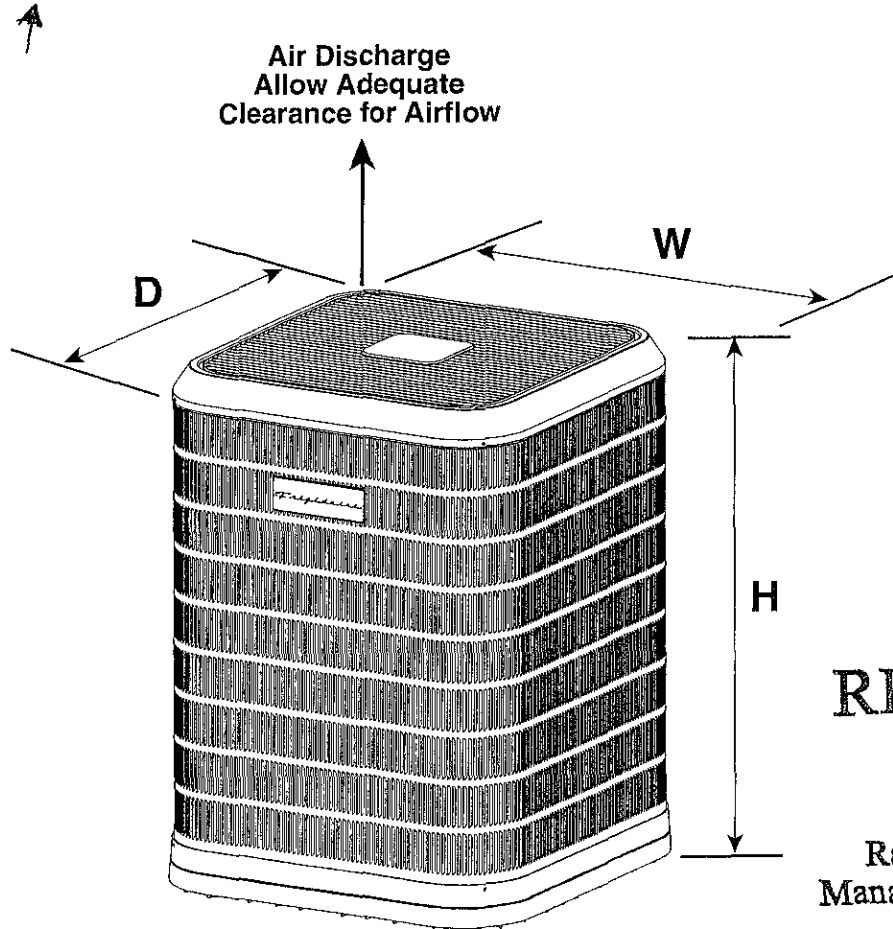

RECEIVED
 OCT 11 2007
 Rapid City Growth
 Management Department

07SR052

ATTN: Rick DORSE

NORDYNE

April 28, 2006

To Whom It May Concern:

Estimated sound rating numbers for Premium FS and FT split system air conditioners and heat pumps equipped with a swept-wing fan blade are shown below.

Without NORDYNE sound blanket installed:

Model FS(4,5)BD	Sound Rating (Decibels)	Model FT(4,5)BD	Sound Rating (Decibels)
018	69.0	018	69.0
024	69.0	024	69.0
030	71.0	030	71.0
036	71.0	036	71.0
042	71.0	042	71.0
048	71.0	048	71.0
060	71.0	060	71.0

With NORDYNE sound blanket installed:

Model FS(4,5)BD	Sound Rating (Decibels)	Model FT(4,5)BD	Sound Rating (Decibels)
018	68.0	018	68.0
024	68.0	024	68.0
030	70.0	030	70.0
036	70.0	036	70.0
042	70.0	042	70.0
048	70.0	048	70.0
060	70.0	060	70.0

If you have any questions, please contact our Technical Service Department at 800-422-4328 option 2.

Sincerely,


James Kistler
Engineering Manager of Split Systems

3000 Phoenix Pkwy
P.O. Box 8809
O'Fallon, MO 63368
636/541-7300

RECEIVED

OCT 11 2007

Rapid City Growth
Management Department

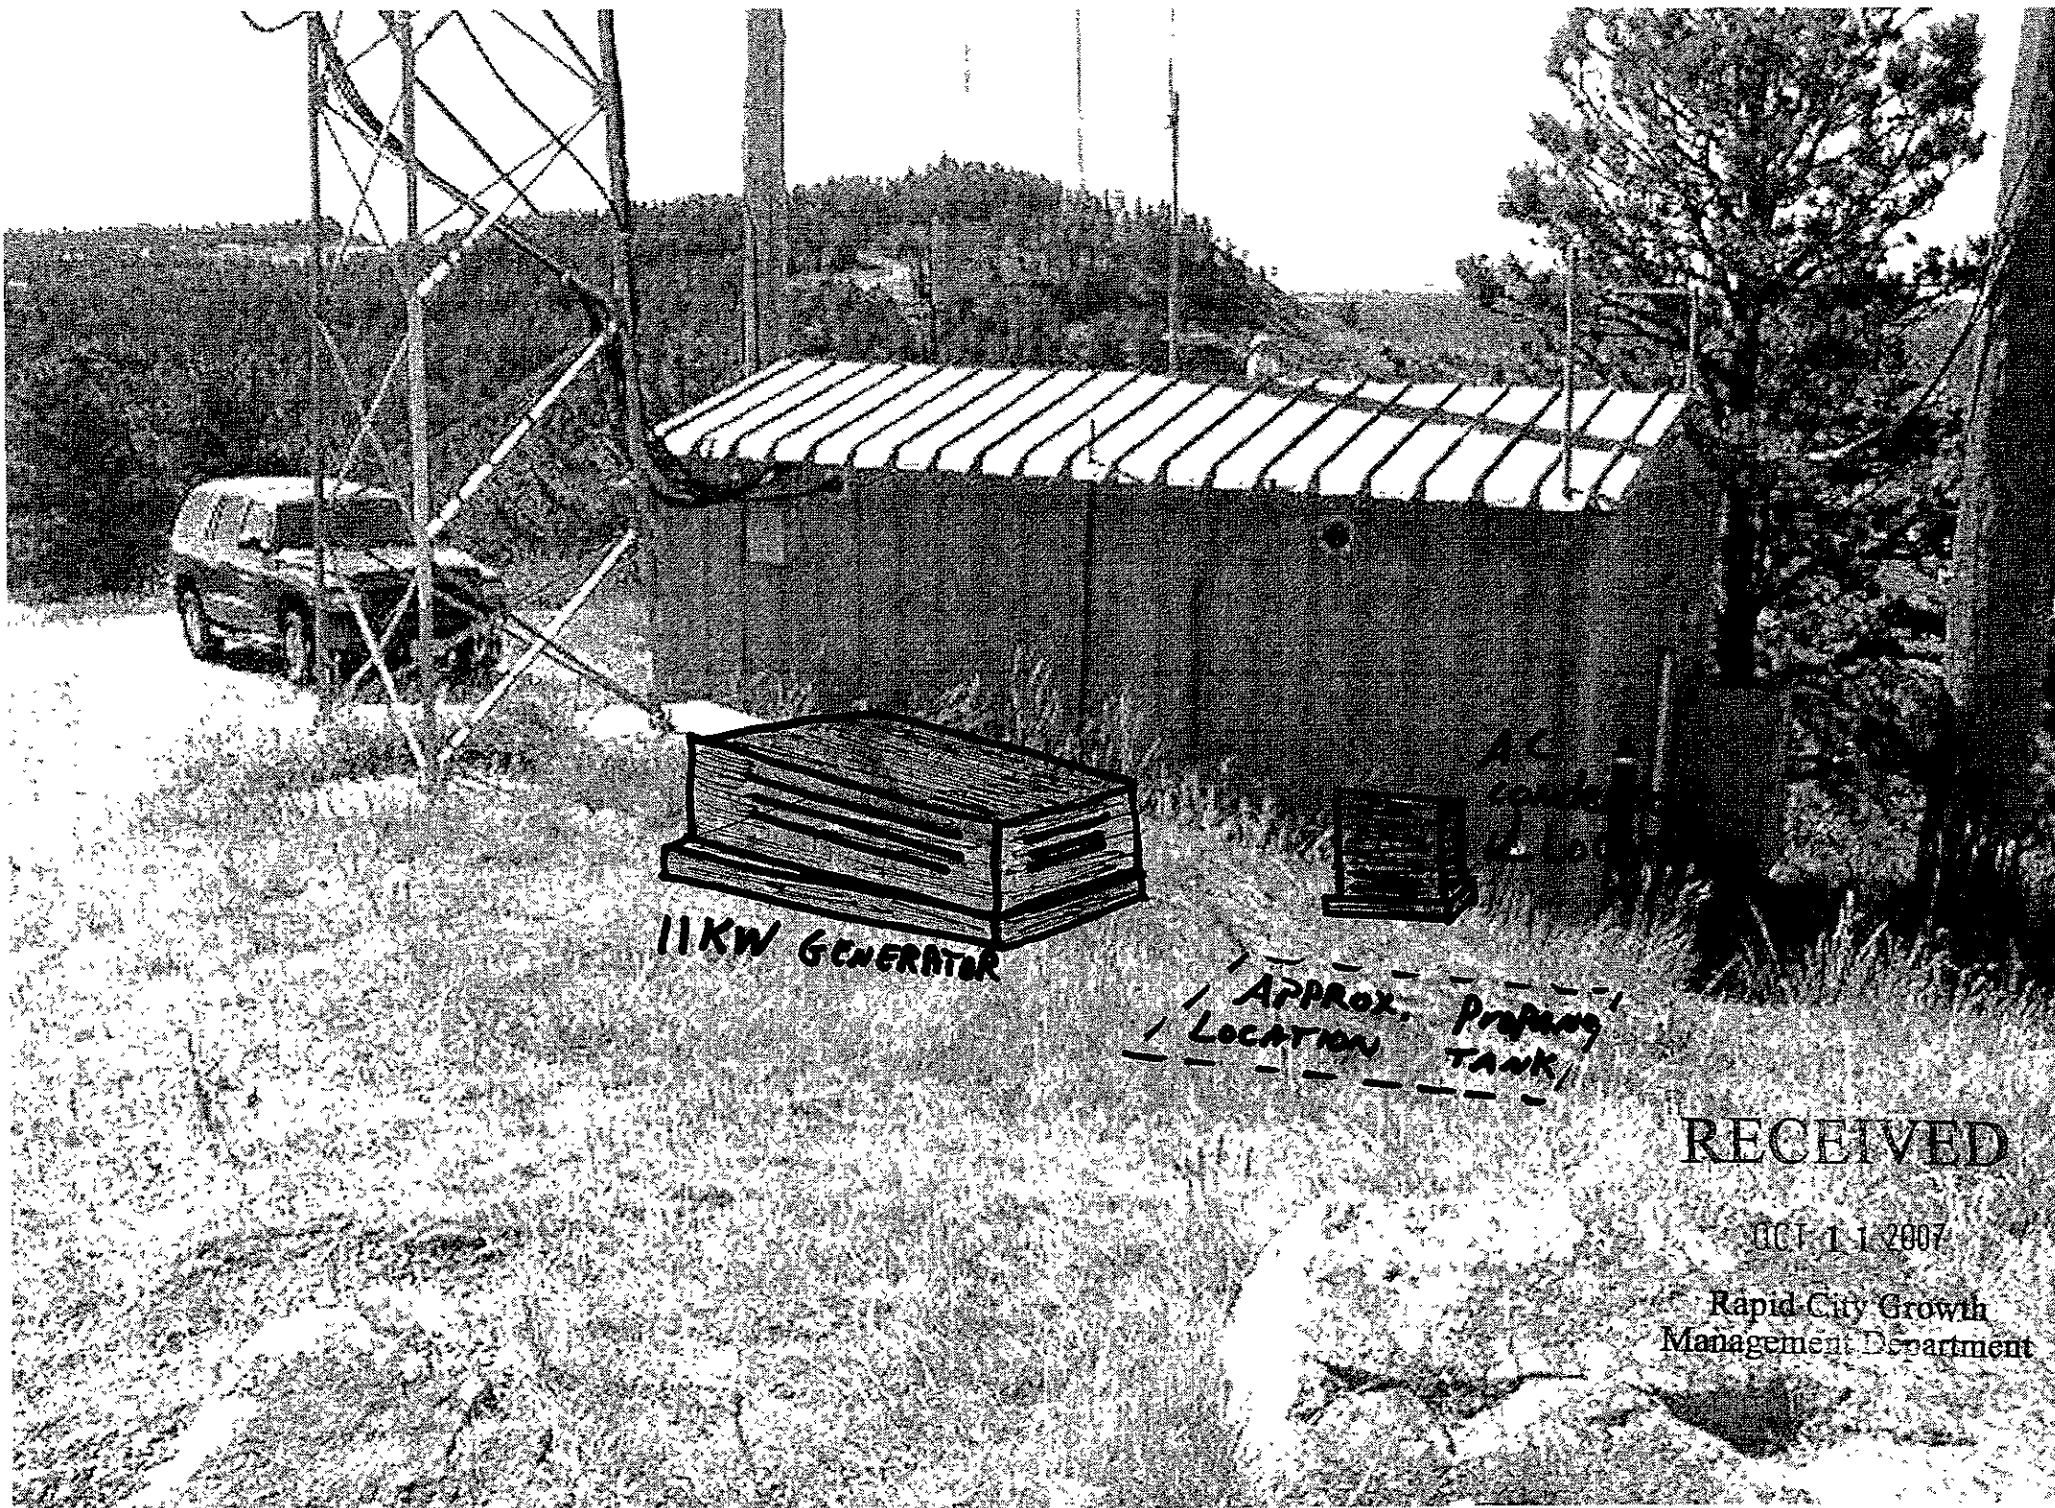

11KW GENERATOR

APPROX. PROPANE
LOCATION TANK

AC

RECEIVED

OCT 11 2007

Rapid City Growth
Management Department

MODEL SERIES



PowerStation
EMERGENCY BACKUP POWER SYSTEM

PM401211

Gaseous Fueled Stationary Standby

11.5KW*

60Hz

Residential/Light Commercial Standby Generator

Model PM401211		Propane Standby Rating**			Full Load Current	Motor Starting	Alternator Insulation	MLCB Rating
Voltage	Phase	Hertz	kW	kVA	Amps	SKVA ¹¹	Class	Amps
120/240	1	60	11	11	91 6/45 8	17	H	50

* Rated for maximum intermittent standby on LPG gas
 ** Nameplate rating for continuous standby operation for the duration of the outage
 Derate 15% when using natural gas Derate 4% per 1000 feet above 500 feet and 1% per 10°F temperature increase above 77°F

¹¹ Rated @ 30% Voltage Dip

07SR052

Standard Features

HONDA GX670 Industrial Engine

- Ultra Quiet & Dependable V-Twin Engine
- Specially Designed For Use On LPG/Natural Gas
- CARB & EPA Certified

2-Pole Alternator

- 2/3 Pitch Winding For Reduced Harmonics (<5%)
- Low Waveform Distortion (<7%)
- Simple & Reliable Self Voltage Regulated Design (± 5%)
- Computer Safe Alternator

Sound Attenuated Weather Enclosure

- 16 Gauge Steel Enclosure With Sound Material Installed
- Composite Mounting Pad Included For Faster Installation
- Powder Painted Almond Color Finish
- Lockable Hinged Top Lid For Ease Of Service
- Critical Grade Muffler Integral To Enclosure

Fuel System

- Operates On Liquefied Petroleum Gas Or Natural Gas
- Simple Field Conversion Between Fuels
- Dual 12v D.C. Positive Lock-off Valves For Added Safety

Cooling System

- Low Maintenance Air/Oil Cooling
- Rated For Operation In Temperatures Up To 104° F
- Factory Equipped With Oil Cooler For Added Protection
- High Temperature Shutdown Protection

Main Line Circuit Breaker


- UL 489 Listed Circuit Breaker Rated 10kA AC @ 240v
- Molded Case Design

Digital Remote Start/Stop Controller

- Automatic Remote Start (2-wire)
- Overcrank Protection
- On-Off-Auto Selector Switch
- Engine Over-Temperature Protection
- Battery Condition Monitoring
- Engine Oil Pressure Protection
- Overspeed Protection
- Underspeed Protection
- Engine Run Time Metering



Listed To The UL2200 Standard

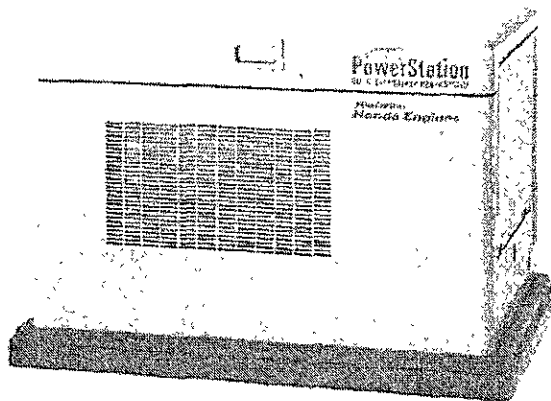


3-Year/1500 Hour Warranty

- Best Standard Warranty In Its' Class

Sound Data

Less than 69 dB(A) Average @ 23' (7m) @ Full Load

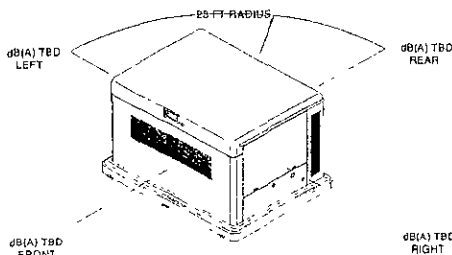

Available Accessories:

- Engine Block Heater Kit (P/N165-0259)
- Transfer Switches

RECEIVED

OCT 11 2011

Rapid City Growth
Management Department

MODEL SERIES



PowerStation™
EMERGENCY BACKUP POWER SYSTEM

PM401211

Gaseous Fueled Stationary Standby

11.5kW*

60Hz

Residential/Light Commercial Standby Generator

* Rated for maximum intermittent standby on LPG fuel

Engine Data 07SR052

General

Manufacturer	Honda
Model	GX-670
Type	4-Cycle, 90° V, Overhead Valve
Horsepower	24 Maximum (LPG) @ 3600rpm
Cylinder Block Material	Aluminum
Cylinders	2
Aspiration	Natural
Air Cleaner	Replaceable Dry Element
Displacement	671 cc
Compression Ratio	8.3:1
Bore	77 mm
Stroke	72 mm
RPM	3600
Engine Governing	± 5% - Mechanical

RECEIVED

OCT 11 2007

Rapid City Growth
Management Department

Fuel System

Fuel System	Honda Fuel Mixer, Secondary Regulator, 12vdc Positive Locking Shut-off Solenoid
Fuel Type	Liquefied Petroleum Gas(Vapor) Or Natural Gas
Injection Method	Carburetor Induction

Lubrication System

Lube Oil System	Centrifugal Pump, Spin-on-Full Flow Filter
Lube Oil Capacity	1.5 Quarts W/Filter
Engine Heater (Accessory)	120V, 100 Watt Thermostatically Controlled

Electrical

Starting Voltage	12v negative ground
Battery Size Required	BCI Group 26, (Battery Rack & 4 Gauge Cables Included)
Cranking Current	450cca @ 0°F
Battery Charging Alternator	10 amps, Regulated
Battery Charger (120v AC)	Bulk - 6A, 12vdc Absorption - 5.5A, Taper To 1.5A Between 13-14.4vdc Float - 0.1 To 0.3A, 13.3vdc K 0.3vdc

Fuel System

Fuel Type	Liquefied Petroleum Gas Vapor or Natural Gas
Fuel Supply Inlet	1/2" NPT
Fuel Supply Pressure	7-11 (in/H ₂ O) / 4-6 (Oz/in ²)

Fuel Consumption



Fuel Consumption @ % Load	LP Vapor (Cubic Feet/Hour)	LP Vapor (Gallons/Hour)	Natural Gas (Cubic Feet/Hour)
25%	40	1.1	75
50%	53	1.4	103
75%	66	1.8	135
100%	81	2.2	186

Engine Generator Application/Installation Data


Engine Cooling Airflow	777 CFM
Alternator Airflow	200 CFM
Total Airflow	977 CFM
Maximum Exhaust Flow	102 CFM
Maximum Exhaust Backpressure	1.5 PSI
Exhaust Temperature	1007 °F

Weight 478lbs.

Dimensions:



CertainTeed WeatherBoards FiberCement Siding

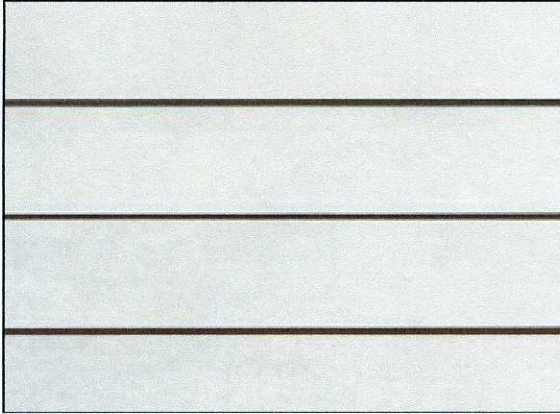

Smooth Lap Siding 7-1/2" x 12'



Beige

RECEIVED

OCT 11 2007

**Rapid City Growth
Management Department**