


EXISTING FLOOR PLAN
SCALE 3/32" = 1'-0"

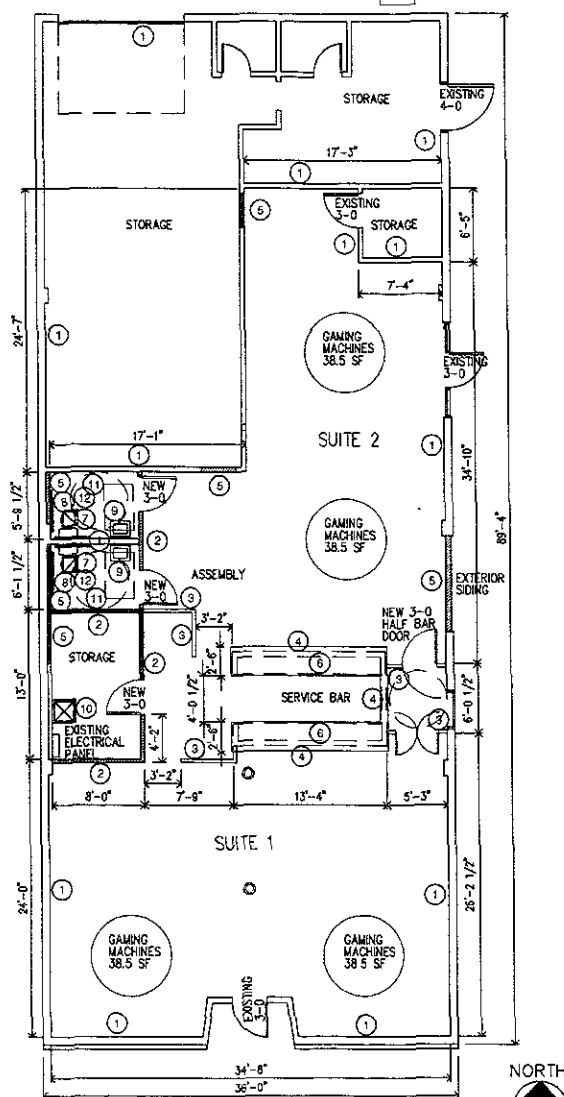

NEW FLOOR PLAN
SCALE 3/32" = 1'-0"

NOTES

- 1 EXISTING WALL/CONDITION
- 2 NEW FULL HEIGHT WALL
2X4 STUDS AT 16" O.C.
5/8" GYPSUM BOARD EACH SIDE
SEE NOTE 'INTERIOR ENVIRONMENT'
FOR TOILET ROOM SURFACES
- 3 NEW 42" HIGH HALF WALL
2X4 STUDS AT 16" O.C.
5/8" GYPSUM BOARD EACH SIDE
- 4 EXISTING WALL CUT TO 42" HIGH
HALF WALL W/ 2X4 STUDS AT 16"
O.C. W/ 5/8" GYPSUM BOARD EACH SIDE
- 5 INFILL WALL-2X WITH 5/8" GWB
- 6 PLASTIC LAMINATE COUNTER TOP
- 7 NEW ADA WATER CLOSET
- 8 NEW ADA GRAB BARS
- 9 NEW ADA MIRROR, PAPER TOWEL DISPENSER,
TOILET PAPER DISPENSER, SOAP DISPENSER
- 10 NEW MOP SERVICE SINK
- 11 SEE NOTE 'INTERIOR ENVIRONMENT'
FOR TOILET ROOM SURFACES
- 12 NEW EXHAUST FAN

2003 IBC CHAPTER 12 - INTERIOR ENVIRONMENT

SECTION 1210
SURROUNDING MATERIALS

IN OTHER THAN DWELLING UNITS, TOILET AND BATHING
ROOM FLOORS SHALL HAVE A SMOOTH, HARD, NONABSORBENT SURFACE
THAT EXTENDS UPWARD ONTO THE WALLS AT LEAST 6 INCHES.

1210.2 WALLS. WALLS WITHIN 2 FEET OF URINALS AND WATER
CLOSETS SHALL HAVE A SMOOTH, HARD, NONABSORBENT SURFACE, TO A
HEIGHT OF 4 FEET ABOVE THE FLOOR, AND EXCEPT FOR STRUCTURAL
ELEMENTS, THE MATERIALS USED IN SUCH WALLS SHALL BE OF A
TYPE THAT IS NOT ADVERSELY AFFECTED BY MOISTURE.

EXCEPTIONS:

1. DWELLING UNITS AND SLEEPING UNITS.
2. TOILET ROOMS THAT ARE NOT ACCESSIBLE TO THE PUBLIC AND
WHICH HAVE NOT MORE THAN ONE WATER CLOSET.

ACCESSORIES SUCH AS GRAB BARS, TOWEL BARS, PAPER DISPENSERS
AND SOAP DISHES, PROVIDED ON OR WITHIN WALLS, SHALL BE INSTALLED
AND SEALED TO PROTECT STRUCTURAL ELEMENTS FROM MOISTURE.

REVISIONS	DATE	DESCRIPTION
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		