



FEATURES & SPECIFICATIONS

INTENDED USE – Ideal for parking areas, street lighting, walkways and car lots.

CONSTRUCTION – Rugged, die-cast, soft corner aluminum housing with 0.12" nominal wall thickness. Die-cast door frame has impact-resistant, tempered, glass lens that is fully gasketed with one-piece tubular silicone.

Finish: Standard finish is dark bronze (DDB) polyester powder finish, with other architectural colors available.

OPTICS – Anodized, aluminum reflectors: **IES full cutoff distributions** R2 (asymmetric), R3 (asymmetric), R4 (forward throw) and R55 (square) are interchangeable. High-performance anodized, segmented aluminum reflectors IES full cutoff distributions SR2 (asymmetric), SR3 (asymmetric) and SR45C (forward throw, sharp cutoff). High-performance reflectors attach with tool-less fasteners and are rotatable and interchangeable.

ELECTRICAL – Ballast: High pressure sodium: 70-150W is high reactance, high power factor. Constant wattage autotransformer for 200-400W. Metal halide: 70-150W is high reactance, high power factor and is standard with pulse-start ignitor technology, "SCWA" not required. Constant wattage autotransformer for 175-400W. Super CWA (pulse start ballast), 88% efficient and EISA legislation compliant, is required for metal halide 151-400W (SCWA option) for US shipments only. CSA, NOM or INTL required for probe start shipments outside of the US. Pulse-start ballast (SCWA) required for 200W, 320W, or 350W. Ballast is 100% factory-tested.

Socket: Porcelain, horizontally oriented medium base socket for 70-150M. Mogul base socket for 175M and above, and 70-400S, with copper alloy, nickel-plated screw shell and center contact. UL listed 1500W, 600V.

LISTINGS – UL Listed (standard). CSA Certified (see Options). UL listed for 25°C ambient and wet locations. IP65 rated in accordance with standard IEC 529.

Specifications subject to change without notice.

Catalog Number	RECEIVED
Notes	
Type	JAN 24 2013

Rapid City Community Planning & Development
CONTOUR
 SERIES


Soft Square Lighting



Specifications

EPA: 1.2 ft.²
 *Weight: 35.9 lbs (16.28 kg)
 Length: 17-1/2" (44.5)
 Width: 17-1/2" (44.5)
 Depth: 7-1/8" (18.1)
 All dimensions are inches (centimeters) unless otherwise specified.
 *Weight as configured in example below.

METAL HALIDE: 70-400W
 HIGH PRESSURE SODIUM: 70-400W
 20' TO 35' MOUNTING

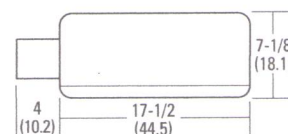

ORDERING INFORMATION For shortest lead times, configure product using **bolded options**.

Example: KAD 400M R3 TB SCWA SPD04 LP1

KAD	Wattage			Distribution		Voltage	Ballast	Mounting ¹²	
KAD	Metal halide	High pressure sodium ¹	Ceramic metal halide	Standard reflectors	High performance reflectors ⁹	120	(blank) Magnetic ballast	Ships in fixture carton	
	70M ^{1,2} 250M⁵	70S	70MHC ^{1,2}	R2 IES type II asymmetric ⁷	SR2 IES type II asymmetric ⁷	208 ⁹	CWI Contant wattage isolated ¹¹	SPD	Square pole
	100M ¹ 320M ⁴	100S	100MHC ¹	R3 IES type III asymmetric ⁷	SR3 IES type III asymmetric ⁷	240 ⁹	Pulse Start SCWA Super CWA pulse-start ballast	RPD	Round pole
	150M 350M ^{3,4}	150S	150MHC	R4 IES type IV forward throw ⁷	SR45C IES type IV forward throw	277	NOTE: For shipments to U.S. territories, SCWA must be specified to comply with EISA.	WBD	Wall bracket
	175M ³ 400M^{5,6}	150S	150MHC	R55 IES type V square		347		WWD	Wood or pole wall
	200M ⁴	250S				480 ⁹		Ships separately ^{13,14}	
		400S				TB ¹⁰		DAD12P	Degree arm (pole)
						23050HZ ¹¹		DAD12WB	Degree arm (wall)
								WBA	Decorative wall bracket ¹⁵
								KMA	Mast arm external fitter
								KTMB	Twin mounting bar
									Arm length
									04 4" arm
									06 6" arm
									09 9" arm
									12 12" arm

Options				Finish ²⁰	Lamp ²¹
Shipped installed in fixture		QRSTD QRS time delay ¹⁸	Shipped separately ¹³	(blank) Dark bronze	LPI Lamp included
SF Single fuse (120, 277, 347V) ¹⁶	WTB Terminal wiring block ¹⁷	HS House side shield	PE1 NEMA twist-lock PE (120, 208, 240V)	DWH White	L/LP Less lamp
DF Double fuse (208, 240, 480V) ¹⁶	CSA CSA Certified	PE3 NEMA twist-lock PE (347V)	PE2 NEMA twist-lock PE (120, 208, 240V)	DBL Black	
PD Power tray ¹⁷	INTL Available MH for probe start shipping outside the U.S.	PE4 NEMA twist-lock PE (480V)	PE7 NEMA twist-lock PE (277V)	DMB Medium bronze	
PER NEMA twist-lock receptacle only (no photocontrol)	REGC1 California Title 20, effective 1/1/2010	SC Shorting cap for PER option	VG Vandal guard ¹⁹	DNA Natural aluminum	
QRS Quartz restrrike system ¹⁸		WG Wire guard ¹⁹			

- Notes**
- Not available with SCWA.
 - Not available with 480V.
 - These wattages do not comply with California Title 20 regulations.
 - Must be ordered with SCWA.
 - These wattages require the REGC1 option to be chosen for shipments into California for Title 20 compliance. 250M REGC1 is not available in 347 or 480V.
 - Reduced jacket ED28 required for SR2, SR3 and SR45C optics.
 - House-side shield available.
 - High performance reflectors not available with QRSTD.
 - Must specify CWI for use in Canada.
 - Optional multi-tap ballast (120, 208, 240, 277V; in Canada: 120, 277, 347V).
 - Consult factory for available wattages.
 - 9" arm is required when two or more luminaires are oriented on a 90° drilling pattern.
 - May be ordered as an accessory.
 - Must specify finish when ordered as an accessory.
 - Available with SPD04 and SPD09.
 - Must specify voltage. N/A with TB.
 - Only available with SR2, SR3 and SR45C optics.
 - Max allowable wattage lamp included.
 - Prefix with KAD when ordered as an accessory.
 - See www.lithonia.com/archcolors for additional color options.
 - Must be specified. L/LP not available with MHC.
 - Must use RP009.


Accessories: Tenon Mounting Slipfitter (RPxx required.)
 Order as separate catalog number. Must be used with pole mounting.

Number of fixtures						
Tenon O.D.	One	Two@180°	Two@90°	Three@120°	Three@90°	Four@90°
2-3/8"	T20-190	T20-280	T20-290 ²²	T20-320 ²²	T20-390 ²²	T20-490 ²²
2-7/8"	T25-190	T25-280	T25-290 ²²	T25-320	T25-390 ²²	T25-490 ²²
4"	T35-190	T35-280	T35-290 ²²	T35-320	T35-390 ²²	T35-490 ²²

KAD Metal Halide, Arm-mounted Soft Square Cutoff


Coefficient of Utilization _____
 Initial Footcandles _____

KAD 400M R2 Test no. 1193083101P
ISOILLUMINANCE PLOT (Footcandle)

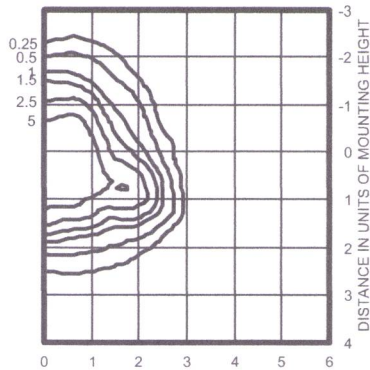

400W pulse start metal halide lamp, rated 38000 lumens. Footcandle values based on 20' mounting height.
 Classification: Type II, Short, Full Cutoff

KAD 400M R3 Test no. 1192040902P
ISOILLUMINANCE PLOT (Footcandle)

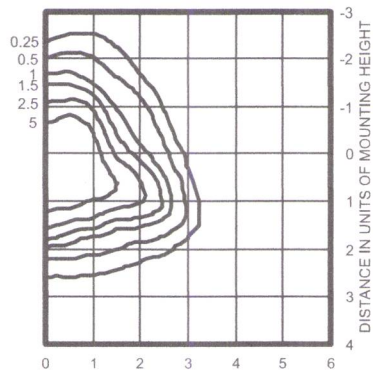


400W pulse start metal halide lamp, rated 38,000 lumens. Footcandle values based on 20' mounting height.
 Classification: Type II, Short, Full Cutoff

RECEIVED

JAN 24 2013


Rapid City Community Planning & Development Services

KAD 400M R4 Test no. 1191110101P
ISOILLUMINANCE PLOT (Footcandle)

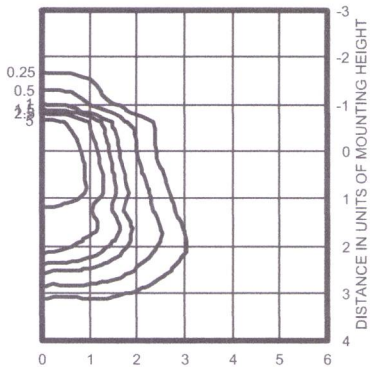


400W pulse start metal halide lamp, rated 38,000 lumens. Footcandle values based on 20' mounting height.
 Classification: Unclassified (Type III, Very Short), Full Cutoff

KAD 400M R4HS Test no. 1192061101P
ISOILLUMINANCE PLOT (Footcandle)

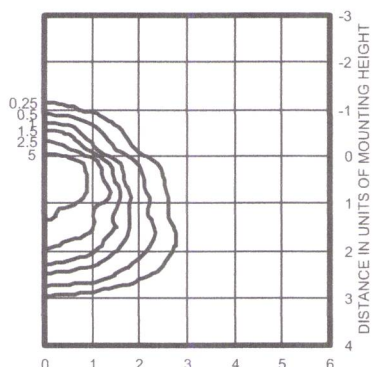

400W pulse start metal halide lamp, rated 38,000 lumens. Footcandle values based on 20' mounting height.
 Classification: Unclassified (Type III, Very Short), Full

KAD 400M R5S Test no. 1194040801P
ISOILLUMINANCE PLOT (Footcandle)

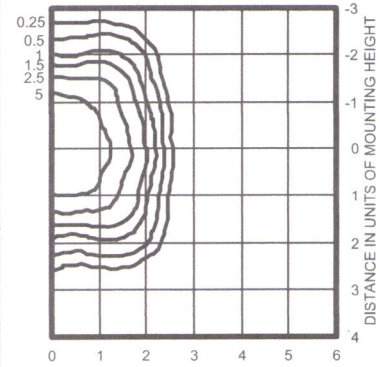

400W pulse start metal halide lamp, rated 38000 lumens. Footcandle values based on 20' mounting height.
 Classification: Unclassified (Type NC, Very Short), Full Cutoff

Notes

- 1 Photometric data for other distributions can be accessed at www.lithonia.com.
- 2 Tested to current IES and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory data and actual field measurements. Dimensions and specifications on this sheet are based on the most current available data and are subject to change without notice.
- 3 For electrical characteristics, consult outdoor technical data specification sheets on www.lithonia.com.

Mounting Height Correction Factor

(Multiply the fc level by the correction factor)

25 ft. = 0.64

35 ft. = 0.32

40 ft. = 0.25

$$\left(\frac{\text{Existing Mounting Height}}{\text{New Mounting Height}} \right)^2 = \text{Correction Factor}$$