

B1 FLOOR PLAN
SCALE: 1/8" = 1'-0"

PROPOSED INTERIOR FINISHES

THE FLOORING WILL BE A 4"x36" WEATHERED "WOOD PLANK" BY KARNDEAN INTERNATIONAL.


THE WALLS WILL BE PAINTED GYP. BD., ANY EXISTING BRICK COLUMNS WILL BE LEFT EXPOSED & UNPAINTED.

THE CEILING WILL BE A SUSPENDED GYP. BD. CEILING THAT WILL BE MOUNTED AS HIGH AS POSSIBLE. THERE IS AN EXISTING PERIMETER SOFFIT OF GYP. BD. NEAR THE EXTERIOR WINDOWS & WE WILL ADD A SOFFIT OVER THE BAR.


THE RESTROOMS WILL HAVE CERAMIC TILE ON THE FLOORS & WALLS UP TO A CERTAIN HEIGHT. THERE WILL BE GYP. BD. ON THE WALLS ABOVE THE TILE & ON THE CEILING.

THERE WILL BE PLASTIC LAMINATE CASEWORK & BOOTHS WITH A COMBINATION OF VINYL & FABRIC COVERINGS.

THE KITCHEN WILL HAVE STAINLESS STEEL ON THE WALLS. THE FLOORS WILL HAVE VINYL FLOORING WITH HEAT WELDED SEAMS. THE CEILING WILL BE GYP. BD. WITH EPOXY PAINT.

**UPPER DECK**
ARCHITECTS, INC.
1301 W. DAKOTA ST. - SUITE 212
RAPID CITY, SD 57201
PH: 605 721-0237
FAX: 605 721-0240

CONSULTANT:

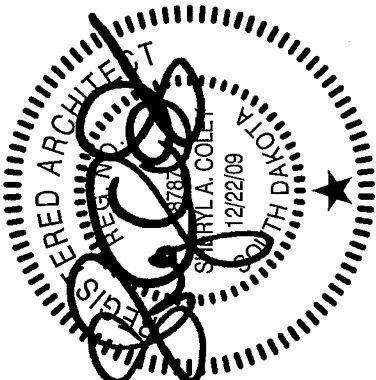

DATE	DESCRIPTION
1/12/22/09	HIST. SOCIETY SUBMITAL

© UPPER DECK ARCHITECTS 2009
All Drawn & Written Information Appearing Within Shall Not Be Duplicated, Disclosed Or Otherwise Without The Express Written Consent Of Upper Deck Architects, Inc.

Tally's Silver Spoon
Renovation
Rapid City, South Dakota

PROJECT #: 09142
DRAWN BY: RRS
CHECK BY: SAC
SHEET TITLE:
FLOOR PLAN

A-101