


ELECTRICAL SCHEDULE

CODE	DESCRIPTION	QTY.
⊙	100 WATT PORCELAIN FIXTURE	14
▭	4' SURFACE MOUNT FLOURESENT FIXTURE	28
▽	ELECTRICAL PAK MODEL DS2 35 WALL HIGH PRESSURE SODIUM	4
⊕	EXIT LIGHT	4
□	COMBINATION LIGHT/FAN	2
⊕	DUPLEX RECEPTICLE	34
⊕ ₁₄₀	DUPLEX RECEPTICAL AT 40" HIGH (GFCI)	2
⊕ _{WP}	WATER PROOF DUPLEX RECEPTICLE (GFCI)	3
⊞	SINGLE POLE SWITCH	9
⊞ ₃	3-WAY SWITCH	10
⊕	THERMOSTAT	2
⊗	FURNACE	2
⊕	WATER HEATER	2
▽	TELEPHONE JACK	13

NOTE:

- 1) Building shall have gasfired furnoce with a sealed combustion chamber.
- 2) Building shall have an electric water heater.
- 3) Bathroom - see specifications page 11
- 4) All interior walls and finish work by others. Interior finishes shall meet or exceed the requirements of ILHR 51.07.

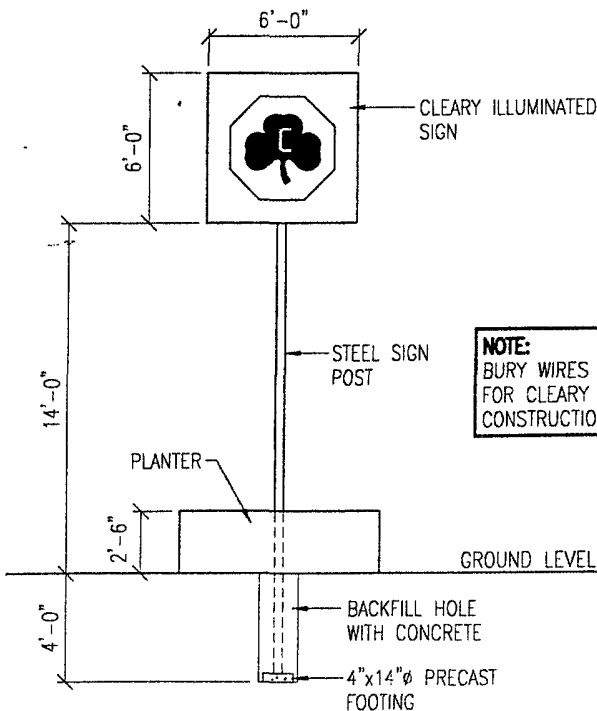

NOTE:
BURY WIRES IN GROUND FOR CLEARY SIGN DURING CONSTRUCTION

CLEARY SIGN DETAIL

DATE: 5-18-98
SCALE: NONE
DRAWN BY: T. KALDENBERG

REVISIONS		
NO.	DATE	BY
1	8-5-98	TGK
2		
3		

CT INVESTMENTS (RAPID CITY OFFICE)

60'x36'x13'-8" WITH 60'x30'x9'-10" ENERGY MISER

ELECTRICAL LAYOUT PLAN

JOB NO.
2254-98

CLEARY

BUILDING CORP.
HIGHWAY "69" SOUTH
P.O. BOX 930220
VERONA, WI
53593-0220

SHEET

6 OF 13