DEC 26 2003
Rapid City
Planning Department

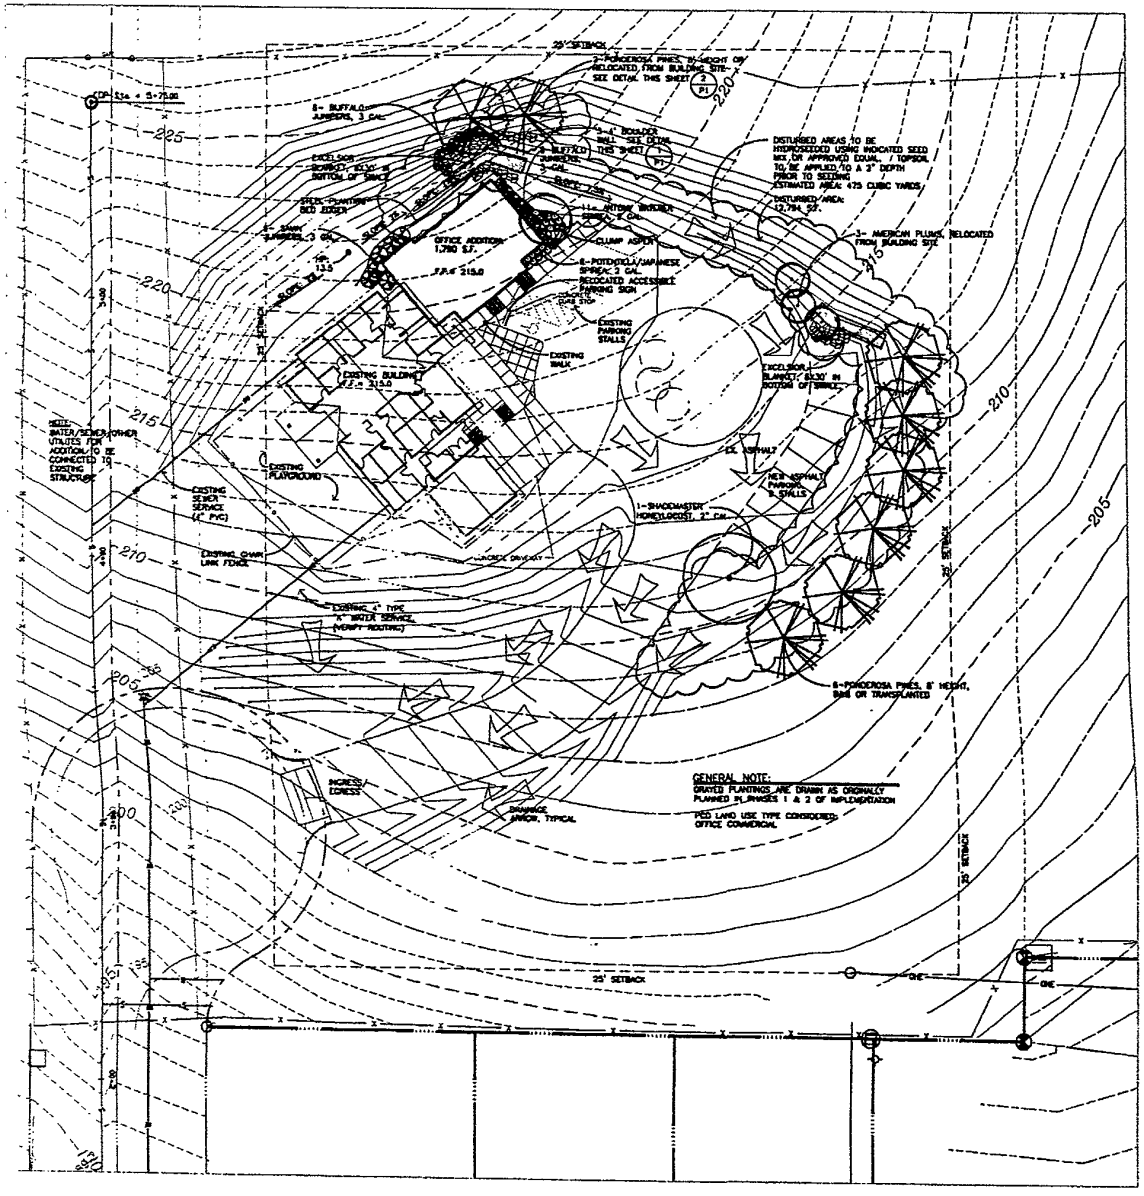

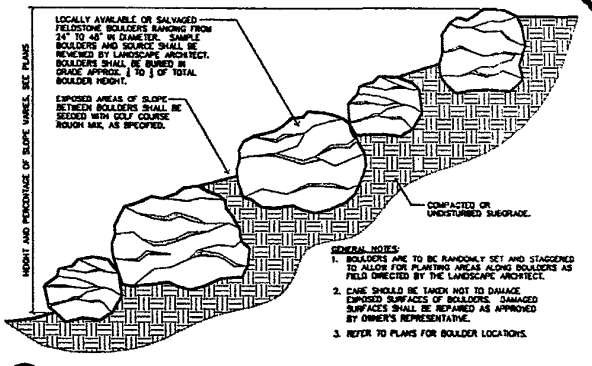

1 / P1 SECTION: TYPICAL BOULDER PLACEMENT ON SLOPE
NOT TO SCALE

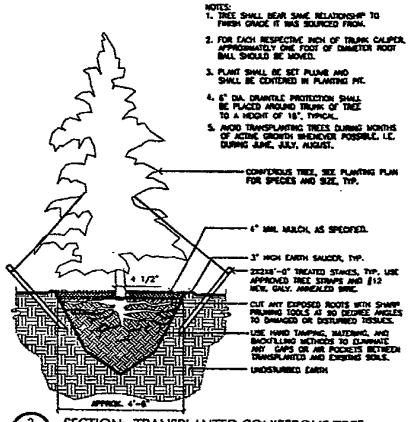

2 / P1 SECTION: TRANSPLANTED CONIFEROUS TREE
NOT TO SCALE

SEEDING NOTES
SEED SHALL BE BROADCAST AND RAKED INTO CLEAN TOPSOIL AT A RATE OF 4 LBS PER 1,000 SF.

SEED MIX SHALL CONSIST OF THE FOLLOWING:

SEED	GERMINATION	PURITY
20% KENTUCKY BLUEGRASS	80%	85%
10% KENTUCKY 31 FESCUE	85%	85%
10% CHAMPION PERENNIAL RYE	85%	85%
10% CREEPING RED FESCUE	80%	85%
20% ANNUAL RYE	85%	85%
30% CRESTED WHEATGRASS	80%	80%

NOTE: CONTRACTOR IS REQUIRED TO TOPSOIL AND SEED ALL DISTURBED AREAS UNLESS OTHERWISE NOTED. VERIFY AMOUNTS.

0 10' 20' 40' NORTH
SCALE: 1" = 20'

BLACK HILLS CHILDREN'S HOME
RAPID CITY, SOUTH DAKOTA 12/24/03

SITE PLAN
OFFICE ADDITION

Wyss Associates, Inc.
Landscape Architecture · Golf Course Architecture · Parks & Recreation Design
Director: George Wyss, ASLA
832 Main St. Rapid City, SD 57701
Phone: 605.348.0875
Fax: 605.348.0877

P1