06SV073

SPECIFICATIONS TO BE USED

ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE CITY OF RAPID CITY STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION 2004 EDITION WITH ALL CURRENT UPDATES

UTILITIES

UTILITY LOCATES WERE NOT OBTAINED FOR THE SURVEY SHOWN.

ALL UTILITY COMPANIES SHALL BE CONTACTED BY THE CONTRACTOR BEFORE WORK IS COMMENCED.

UTILITIES:
SOUTH DAKOTA ONE CALL
1-800-781-7474

NOTES:

1. EXISTING TOPOGRAPHY AND EXISTING STRUCTURES SHOWN WERE OBTAINED FROM A LIMITED FIELD SURVEY COMPLETED BY FERBER ENGINEERING COMPANY IN NOVEMBER 2005 AND DESIGN PLANS FOR BOSTON'S PIZZA.

2. ALL DISTURBED AREAS NOT RECEIVING "HARD SURFACING" SHALL HAVE TOPSOIL REPLACED AND SHALL BE SEEDED, FERTILIZED AND MULCHED ACCORDING TO THE RAPID CITY STANDARD STANDARD SPECIFICATION.

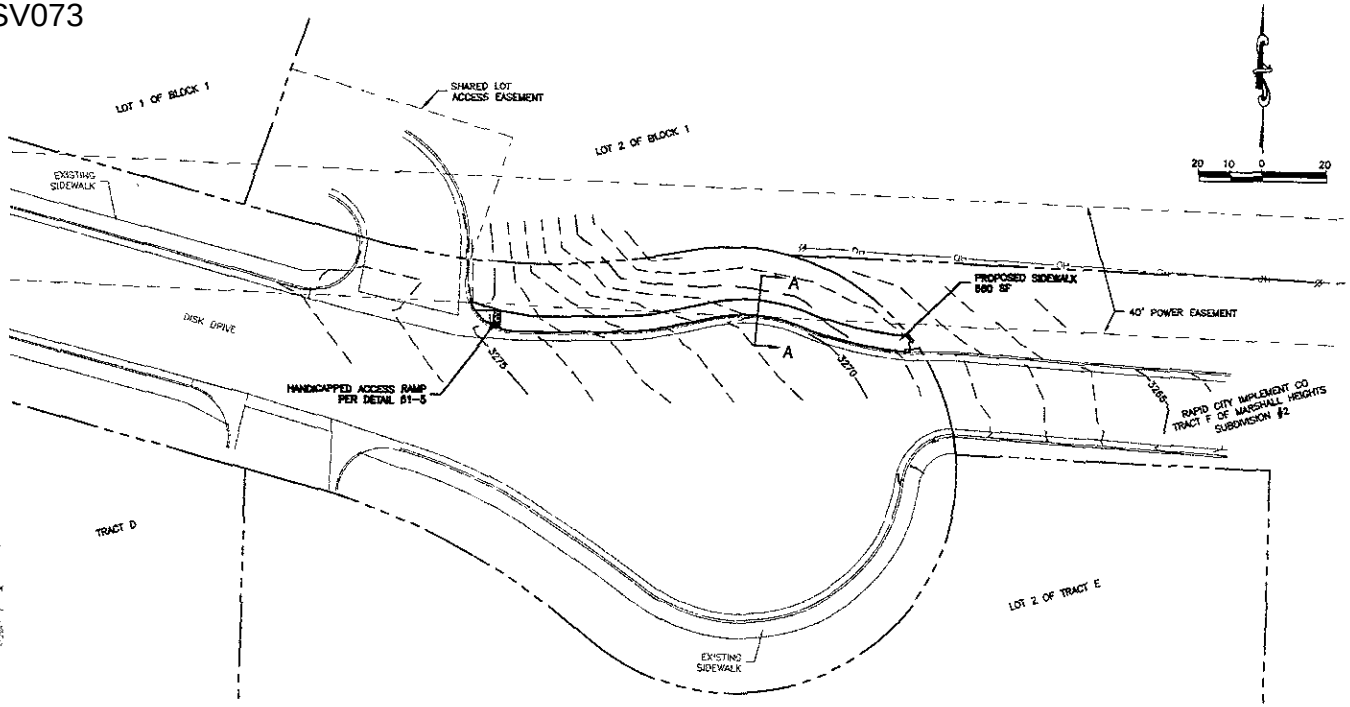

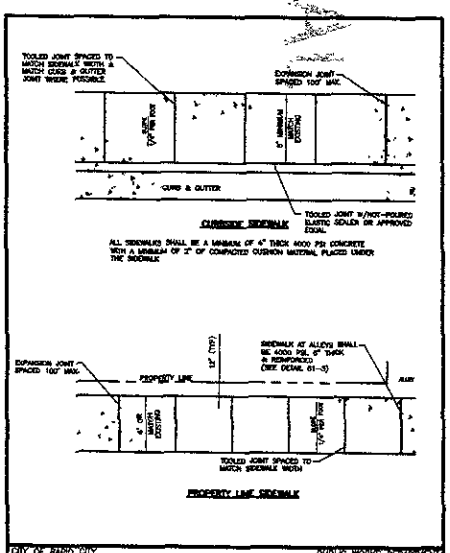

CITY OF RAPID CITY — PUBLIC WORKS DEPARTMENT

SIDEWALKS — DATE: 11-20-03 — SEC. SHT. 61-2

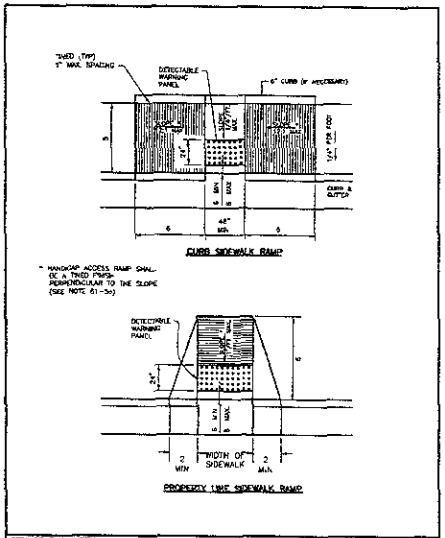

CITY OF RAPID CITY — PUBLIC WORKS DEPARTMENT

HANDICAP ACCESS RAMPS — DATE 5-2-05 — SEC SHT 61-5

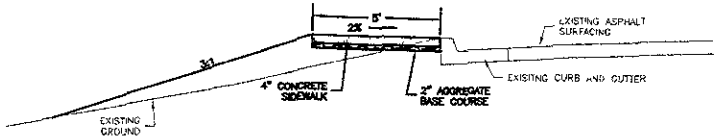

SECTION A-A
N.T.S.

HORIZ SCALE:	AS SHOWN
VERT SCALE:	N/A
DATE:	11-14-05
DESIGNED:	JRV
DRAWN:	JRV
CHECKED:	DPT

NO	DATE	REVISION	APPROVED

Ferber Engineering Company, Inc.

Civil Engineering • Water Resources • Transportation • Land Surveying
735 East Kirk Avenue, Rapid City, SD 57701 • Phone (605) 343-3321

DISK DRIVE ADDITIONAL SIDEWALK

AKERS PROPERTY

PROJECT NO. J05-111

SHEET NO. 1 OF 1