

CITY OF RAPID CITY  
GROWTH MANAGEMENT DEPT.  
DEVELOPMENT SERVICES

Please see released for general information with applicable governmental regulations, including zoning change and engineering standards. The City of Rapid City does not verify the accuracy, appropriateness or completeness of the plans or designs which are the responsibility of the engineer of record. All necessary permits shall be obtained prior to construction of the proposed public improvements.

DREAM DESIGN INTERNATIONAL, INC.  
QUALIFYING: LANDSCAPE ARCHITECTURE  
ARCHITECTURE  
CONSTRUCTION ADMINISTRATION





PRELIMINARY FOR REVIEW ONLY

LEGEND

- HEAVY-DUTY PAVEMENTS - 6" ASPHALT WITH 4" AGGREGATE BASE COURSE
- LIGHT-DUTY PAVEMENTS - 5" ASPHALT WITH 4" AGGREGATE BASE COURSE
- LOADING DOCK PAVEMENT - BY BLDG CONTRACTOR REFER TO ARCHITECTURAL DRAWINGS
- LIGHT POLE - BY OTHERS

NOTES

- ALL SIDEWALKS ON THIS PROJECT SHALL BE 4" THICK WITH 3" GRAVEL CUSHION
- ALL DIMENSIONS ARE TO FACE OF CURB OR TO EDGE OF STRIPING
- FOR CURB RADIUS INFORMATION SEE THE SITE LAYOUT & STRIPING PLAN
- PARKING SUMMARY:
  - TOTAL PARKING REQUIRED = 400 (3 SPACES/1000 SF)
  - TOTAL PARKING PROVIDED = 488 SPACES
  - 25 H.C. SPACES TO H.C. SPACES
  - 4C PARKING REQUIRED = 10 (2% OF 504 SPACES)
  - 4C PARKING PROVIDED = 10 SPACES

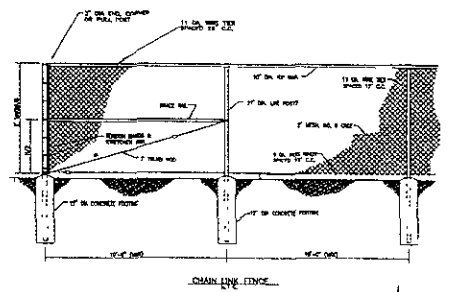

RECEIVED

APR 2 0 2008

RAPID CENTER PHASE I

SITE PLAN AMENDMENT 1

REVISED PCD #1