

**EROSION CONTROL NOTES**




THE BIDDERS PROPOSAL INCLUDES QUANTITIES OF 12" STRAW MATTE, SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE, SEDIMENT CONTROL AT TYPE E DROP INLET AND HIGH FLOW SILT FENCE TO BE USED BY THE CONTRACTOR FOR TEMPORARY EROSION CONTROL AND WATER POLLUTION CONTROL. WHEN USED, THESE DEVICES WILL BE MEASURED IN THE FIELD AND PAID FOR AT THE CONTRACT UNIT PRICES FOR THE RESPECTIVE ITEMS.

MAINTENANCE AND REMOVAL OF EROSION CONTROL ITEMS, INSTALLATION AND REMOVAL OF STABILIZED WORK ENTRANCES, REMOVAL OF SEDIMENT, PREPARATION OF THE STORMWATER POLLUTION PREVENTION PLAN, AND ANY OTHER EROSION CONTROL ITEMS THE CONTRACTOR WISHES TO USE SHALL BE INCIDENTAL TO THE CONTRACT LUMP SUM PRICE FOR "EROSION CONTROL."

CONTRACTOR MAY SUBSTITUTE 12" MULCH FILTER SOCK IN LIEU OF STRAW MATTES, HOWEVER THE INSTALLATION SHALL REMAIN THE SAME.

PAYMENT FOR USE OF ITEMS LISTED IN THE BIDDERS PROPOSAL SHALL BE AT THE CONTRACT UNIT PRICE. PAYMENT FOR USE OF ITEMS NOT LISTED IN THE BIDDERS PROPOSAL SHALL BE INCLUDED IN THE CONTRACT LUMP SUM PRICE FOR "EROSION CONTROL."

LIST OF ITEMS INCLUDED IN PROJECT FOR EROSION CONTROL PURPOSES	QUANTITY	UNIT
12" STRAW MATTE	150	LF
HIGH FLOW SILT FENCE	750	LF
SEDIMENT CONTROL AT INLET WITH FRAME AND GRATE	17	SA
SEDIMENT CONTROL AT TYPE E DROP INLET	1	SA
EROSION CONTROL	1	LS

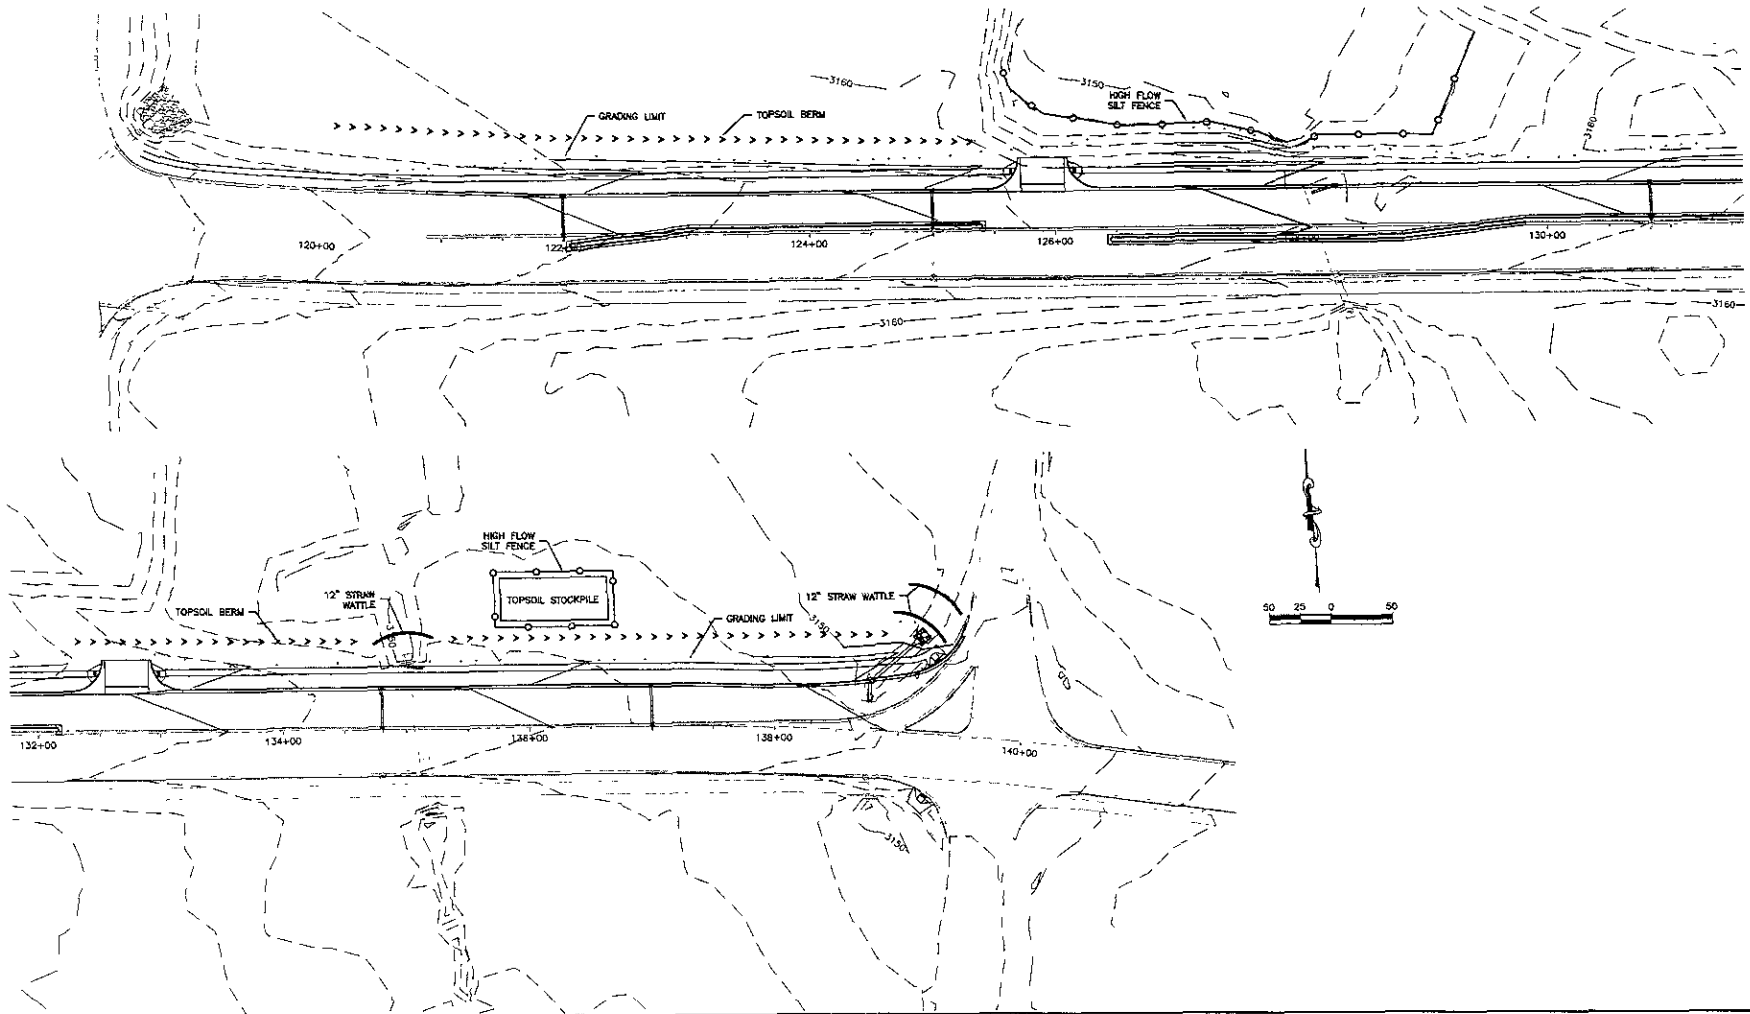

North Street  
Fire Station LLC

**Ferber  
Engineering  
Company, Inc.**

Chief Estimator: Steve Reinhardt | Land Surveying: David Surawski  
 Chief Engineer: Steve Reinhardt | Land Surveying: David Surawski  
 225 E. Main Street, Suite 200, Portland, ME 04101

NOT FOR CONSTRUCTION

Scale: AS SHOWN

Designed By: DMS | Drawn By: DMS  
 Check: DMS  
 Design Date: PWD Date: OCT 2008  
 Project No: 02-5-09  
 Project App No: J25-131  
 Surveyed By: Survey Date: AUG 2008  
 Scale: AS SHOWN

**EAST MALL DRIVE WIDENING  
TISH BOULEVARD TO DYESS AVENUE**

02-5-09 P:\02-131\02000\4 East Mall Drive Widening\Plan Sheets\08-131E03-1.dwg