09SR018

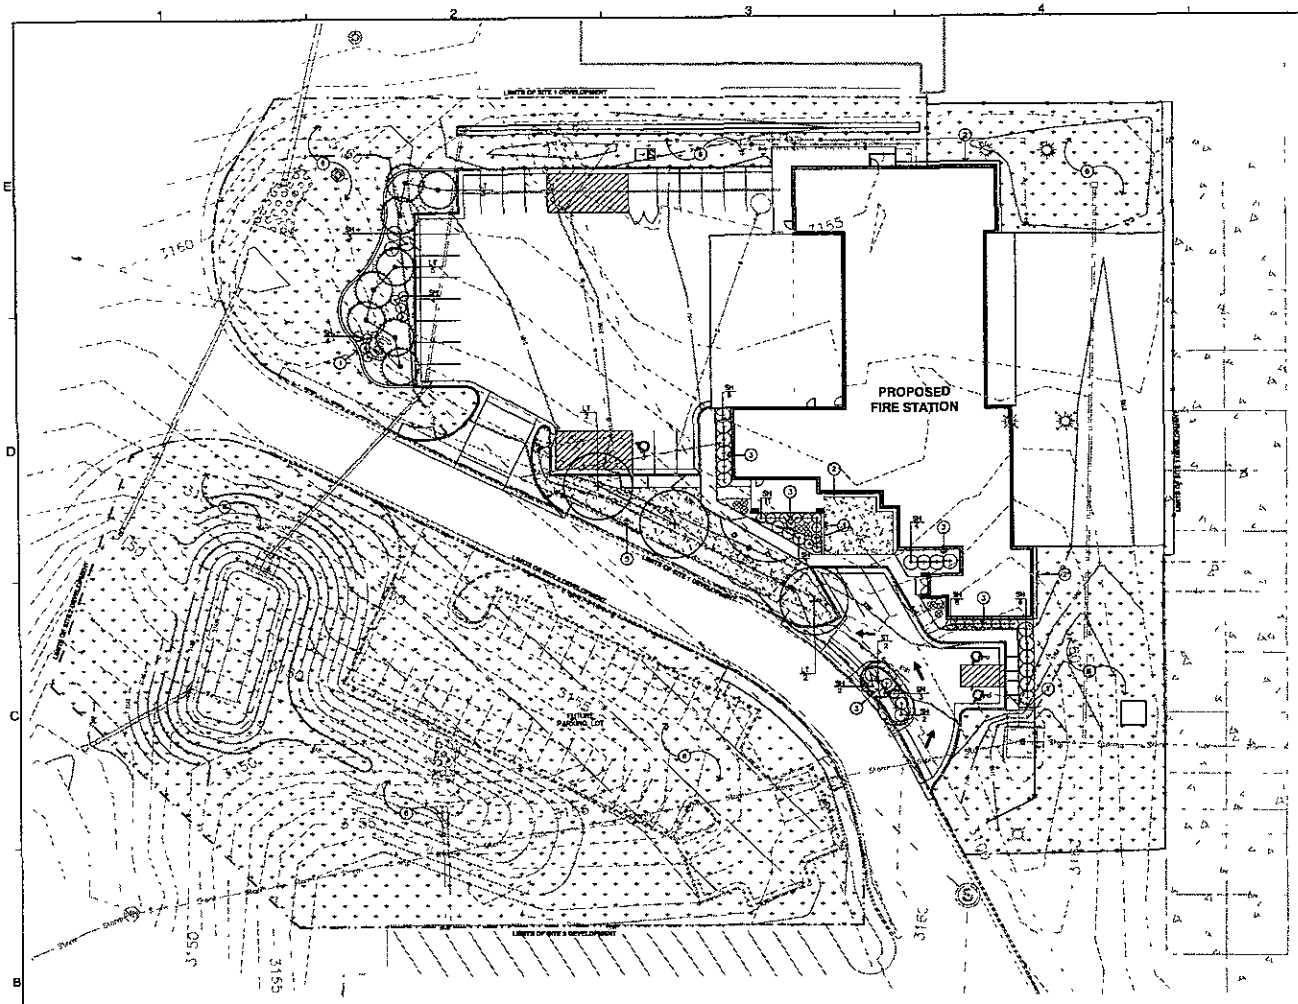

LANDSCAPE NOTES:

- UNDERGROUND UTILITIES: LOCATE ALL PUBLIC AND PRIVATE UTILITIES IN THE PROJECT AREA PRIOR TO CONSTRUCTION. NOTIFY ARCHITECT OF ANY CONFLICTS.
- VERIFY QUANTITIES: QUANTITIES PROVIDED ON DRAWINGS ARE FOR INFORMATION ONLY. VERIFY ACTUAL QUANTITIES OF ALL MATERIALS TO COMPLETE PROJECT.
- PLANTING SOIL: PROVIDE 12" MIN. PLANTING SOIL IN ALL SHRUB AREAS. SEE SPECIFICATIONS AND LANDSCAPE DETAILS.
- LANDSCAPE DETAILS: REFER TO LANDSCAPE AND SITE DETAILS AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.

LANDSCAPE KEY NOTES:

1. CONCRETE MOW EDGE: INSTALL 12" WIDE X 4" DEEP CONCRETE MOW EDGE.
2. CONC. MAINTENANCE EDGE: PROVIDE 18" WIDE CONCRETE MAINTENANCE EDGE ADJACENT TO BLDG.
3. ROCK MULCH: PROVIDE 3" MIN. DEPTH AUTUMN FLAME AGGREGATES BY DAKOTA STONE (605) 574-2780 OR APPROVED EQUAL ON WEED BARRIER FABRIC. DO NOT PLACE ROCK MULCH AGAINST BRANCHES AND STEMS OF PLANT MATERIAL.
4. ORGANIC MULCH: PROVIDE 3" MIN. DEPTH SHREDDED BARK MULCH AROUND TREES IN TURF AREAS.
5. IRRIGATED TURF AREAS: PROVIDE MIN. 4" DEPTH OF TOPSOIL & SEED AS SPECIFIED WITH IRRIGATED SEED MIX.
6. NON-IRRIGATED TURF AREAS: PROVIDE MIN 4" DEPTH OF TOPSOIL & SEED AS SPECIFIED WITH NON-IRRIGATED SEED MIX. AREAS SHOWN TO BE SEEDED ARE APPROXIMATED - REFER TO DEMOLITION, GRADING, AND UTILITY PLANS FOR AREAS DISTURBED BY CONSTRUCTION. CONTRACTOR TO SEED ALL TURF AREAS DISTURBED BY CONSTRUCTION.

LANDSCAPE MATERIAL POINT TABLE

SITE 1 AREA INFORMATION:

DEVELOPED AREA:	80,217 SF
BUILDING AREA:	12,723 SF
TOTAL LANDSCAPE POINTS REQUIRED:	87,494

SITE 1 LANDSCAPE POINTS:

PLANT TYPE:	QUANTITY:	POINTS:	TOTAL:
LARGE TREE (LT):	11	2,000	22,000
MEDIUM TREE (MT):	–	1,000	–
SMALL TREE (ST):	2	500	1,000
SHRUB (SH):	56	250	14,500
TURF AREA:	3,023 SY	10	30,230
TOTAL LANDSCAPE POINTS:			87,730

SITE 2 AREA INFORMATION:

DEVELOPED AREA:	43,938 SF
BUILDING AREA:	0 SF
TOTAL LANDSCAPE POINTS REQUIRED:	43,938

SITE 2 LANDSCAPE POINTS:

PLANT TYPE:	QUANTITY:	POINTS:	TOTAL:
TURF AREA:	4,914 SY	10	48,140
TOTAL LANDSCAPE POINTS:			48,140

LANDSCAPE SYMBOLS:

- DECIDUOUS TREE
- EVERGREEN TREE
- ORNAMENTAL TREE
- DECIDUOUS SHRUB
- EVERGREEN SHRUB
- PERENNIAL/GRASS
- CONC. MOW EDGING
- IRRIGATED TURF AREA
- NON-IRRIGATED TURF AREA

LANDSCAPE PLAN

0' 10' 20' 40' NORTH

TSP
To Solve. To Excel. Together
TSP Inc.
600 Kansas City St.
Rapid City SD 57701
phone: (605) 343-6152
fax: (605) 343-7159
www.tsp.com
Architecture
Engineering
Construction

CONSULTANTS:

HNTB
7900 International Drive
Minneapolis MN 55425
phone (952)345-3982

DESIGN WORKS INC.
3315 Saint Joseph St.
Suite B
Rapid City, SD 57702
Tele: 605-394-0994
Fax: 605-394-9588

PROJECT TITLE:

RAPID CITY REGIONAL AIRPORT A.R.F.F. STATION
Rapid City, South Dakota

ISSUES:

MARK	DATE	DESCRIPTION
#0	10/20/11	PRELIMINARY DRAWINGS

REVISIONS:

MARK	DATE	DESCRIPTION

TSP PROJECT #: 03070862
DRAWN BY: TJD
CHECK BY: RJF
© TSP 2011

SHEET TITLE:

LANDSCAPE PLAN

SHEET NUMBER:

L-101

PRELIMINARY- NOT FOR CONSTRUCTION

LISTED DRAWINGS SCALE(S) UNLESS REDUCED FROM ORIGINAL 30 x 42 FORMAT