12PD027



SIGN ATTACHMENT AT CMU WALL

(12) 1 1/2" = 1'-0"



SIGN ATTACHMENT AT EIFS AND METAL STUD WALL

(11) 1 1/2" = 1'-0"

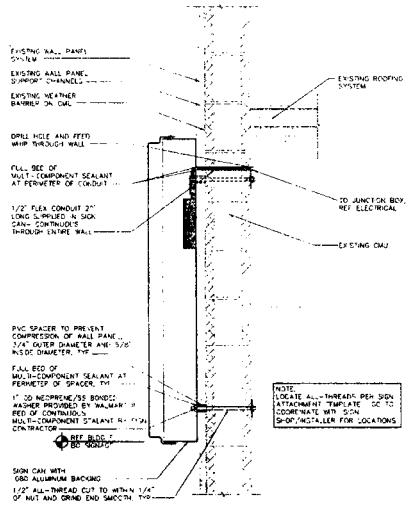

SIGN ATTACHMENT AT WALL PANEL AND CMU BELOW ROOF LINE

(10) 1 1/2" = 1'-0"

EXISTING SIGNAGE SCHEDULE

SIGNAGE LOCATION	QTY	COLOR	SIZE	INDIVIDUAL AREA	TOTAL AREA
FRONT SIGNAGE					
WALMART	1	WHITE	5'-0"	189.00 SF	189.00 SF
SUPERCENTER	1	YELLOW	2'-0"	39.17 SF	39.17 SF
Food Center	1	WHITE	2'-6"	50.45 SF	50.45 SF
Tire & Lube	1	WHITE	2'-6"	44.38 SF	44.38 SF
We Sell for Less	1	WHITE	2'-0"	43.67 SF	43.67 SF
Bakery	1	BLACK	1'-6"	10.25 SF	10.25 SF
Deli	1	BLACK	1'-6"	5.30 SF	5.30 SF
Meat	1	BLACK	1'-6"	6.84 SF	6.84 SF
Produce	1	BLACK	1'-6"	11.67 SF	11.67 SF
Pharmacy	1	BLACK	1'-6"	14.58 SF	14.58 SF
1-Hr Photo	1	BLACK	1'-6"	16.50 SF	16.50 SF
Optical	1	BLACK	1'-6"	10.25 SF	10.25 SF
Tire & Lube	1	BLACK	2'-6"	47.70 SF	47.70 SF
Express =2	1	BLACK	2'-6"	45.77 SF	45.77 SF
TOTAL FRONT SIGNAGE					535.76 SF
AUTO CENTER SIGNAGE					
WALMART	1	RED	1'-3"	11.54 SF	11.54 SF
TIRE & LUBE	1	RED	1'-0"	26.20 SF	26.20 SF
EXPRESS	1	RED	2'-6"	39.69 SF	39.69 SF
Tires	2	WHITE	1'-0"	3.26 SF	6.52 SF
Lube Express	2	WHITE	1'-0"	8.95 SF	17.90 SF
TOTAL AUTO CENTER SIGNAGE					101.85 SF
TOTAL BUILDING SIGNAGE					837.59 SF

NEW SIGNAGE SCHEDULE

SIGNAGE LOCATION	QTY	LIGHTED	COLOR	SIZE	INDIVIDUAL AREA	TOTAL AREA
FRONT SIGNAGE						
Walmart	1	LED	WHITE	5'-0"		
Sparx	1	LED	YELLOW	8'-0"	298.30 SF	298.30 SF
Home & Pharmacy	1	N/A	WHITE	2'-0"	61.85 SF	61.85 SF
Marcel	1	N/A	WHITE	2'-3"	17.27 SF	17.27 SF
Outdoor Living	1	N/A	WHITE	2'-3"	49.47 SF	49.47 SF
Auto Center -->	1	N/A	WHITE	1'-5"	19.47 SF	19.47 SF
TOTAL FRONT SIGNAGE						446.76 SF
AUTO CENTER SIGNAGE						
Auto Center	1	N/A	WHITE	1'-6"	17.75 SF	17.75 SF
Tire	1	N/A	WHITE	1'-0"	2.38 SF	2.38 SF
Lube	1	N/A	WHITE	1'-0"	3.13 SF	3.13 SF
TOTAL AUTO CENTER SIGNAGE						23.26 SF
TOTAL BUILDING SIGNAGE						470.02 SF

GENERAL NOTES

1. SIGNAGE FURNISHED BY WAL-MART AND INSTALLED BY OTHERS
2. GENERAL CONTRACTOR RESPONSIBILITIES
   - A. REMOVE EXISTING EXTERIOR BUILDING SIGNAGE AS NOTED ON SHEET D1
   - B. PROVIDE SUBSTRATE SUITABLE FOR INSTALLATION OF SIGNAGE REFER TO DETAILS ON SHEET A2.1
   - C. PROVIDE JUNCTION BOXES AND CIRCUITRY TO NEW "Walmart" and "Sparx" SIGNAGE. EXISTING (8) BOXES FROM "WALMART" SIGNAGE MAY BE REUSED
   - D. VERIFY VOLTAGE AT CIRCUITS FEEDING LIGHTED SIGNAGE REFER TO ELECTRICAL
   - E. MAKE FINAL TERMINATIONS ON LIGHTED SIGNAGE
3. SIGNAGE CONTRACTOR RESPONSIBILITIES
   - A. FURNISH SPECIFIED CONDUIT FOR LIGHTED SIGNAGE
   - B. MAKE REQUIRED EXTERIOR WALL PENETRATIONS, INSTALL CONDUIT AND SEAL PENETRATIONS PER SPECIFICATION SECTION 07900
   - C. INSTALL SIGNAGE PER DETAILS ON SHEET A2.1

5 SIGNAGE 1/4" = 1'-0"

4 SIGNAGE 1/4" = 1'-0"

3 SIGNAGE 1/4" = 1'-0"

2 SIGNAGE 1/4" = 1'-0"

8 SIGNAGE 1/4" = 1'-0"

7 SIGNAGE 1/4" = 1'-0"



6 SIGNAGE 1/4" = 1'-0"

NOTE TO SIGN INSTALLER:
ALL PRIMARY MOUNTING HOLES MUST BE UTILIZED. IF MOUNTING THROUGH PRIMARY HOLE IS OBSTRUCTED BY REBAR, METAL STUDS, CHANNELS, OR OTHER MISC METAL, SEAL PRIMARY HOLE IN SIGN CAN AND MOUNT THROUGH THE NEAREST ALTERNATE MOUNTING HOLE. PRIMARY HOLES ARE INDICATED WITH PREDRILLED HOLES THROUGH WASHERS. ALTERNATE HOLES ARE INDICATED WITH WASHERS ONLY OR ARE OTHERWISE MARKED.

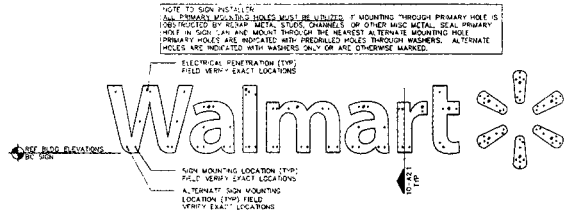

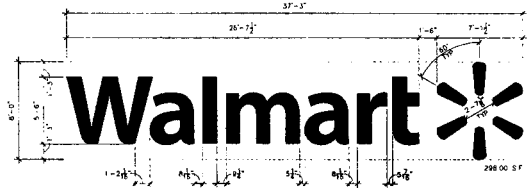

1 SIGNAGE 1/4" = 1'-0"

Scott A. Pierce Architect
211 W Record St., Suite 222
Sioux Falls, SD 57107
Telephone 334/759-3625

SIMULATION FOR REFERENCE ONLY. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THE SIMULATION AS IT RELATES TO THE ACTUAL CONSTRUCTION. THE ARCHITECT ASSUMES NO RESPONSIBILITY FOR THE ACCURACY OF THE SIMULATION AS IT RELATES TO THE ACTUAL CONSTRUCTION.

CONSULTANTS

Walmart
RAPID CITY, SD
STORE NO. 1672
FOR NUMBER 110208 TRUSTEE 2008 SC EXP

ISSUE BLOCK

CHECKED BY	SAP
DRAWN BY	TM
PROTO	2/6 SC EXP
PROTO EXCEL	03/30/12
DOCUMENT DATE	06/19/12

JUN 19 2012

EXTERIOR SIGNAGE

SHEET: A2.1