

Treated 35' utility pole is needed.
Utility pole buried 5'.



Osprey Nesting Platform


Redwood Box will be provided.

4'x4'x1' with perches.

Canyon Lake Box will have 2 alternating perches (rather than 2 facing the same way) to allow birds to chose which perch to use in windy conditions.

Bottom: woven wire for drainage.

Predator guard: Aluminum flashing will be provided.

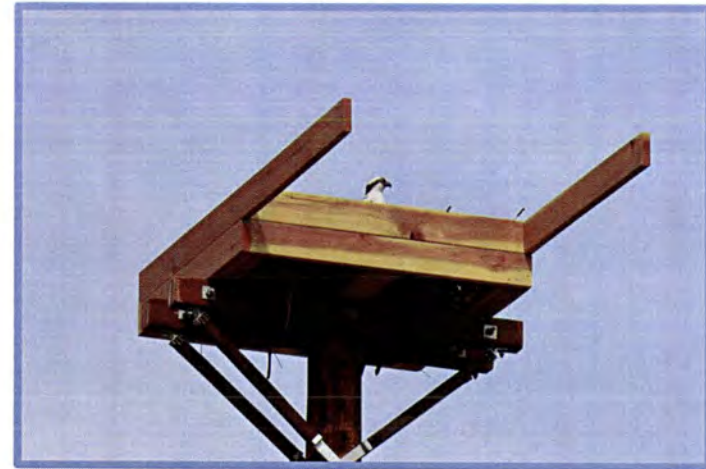

Supports and hardware to attach box are needed. No materials list available.
Box will be attached on site.



RECEIVED

AUG 12 2015